

Rockwood Lock Side Door Edge Order Form

The global leader in
door opening solutions

Fill out this form and email to: orders.rockwood@assaabloy.com / or fax to: 800-922-9212

Customer Information

Company Name: _____ Date: _____

Account #: _____ Phone/Fax: _____ / _____

Email: _____ PO #: _____

Select a Mortised 300 301 302 302B
Door Edge: Non-Mortised 304 305 306-RKW 306-AST 306B 306B-AST
 308 309 310 310-B 310BS
 Other _____

Order Line #: _____ Quantity: _____ Handing: _____ Tag. No's: _____

Finish: _____

Select Cutout,
Door Type and Fill
in Dimensions:

UL Rated

_____ * **Door Edge
Height if different
from net door height**

Astragal Side

(306-AST, 306B-AST ONLY)

- Active Door
- Inactive Door

Specify Mounting

(if not standard)


- Torx Screws
- Tek Screws

* Standard Door
Thickness is 1 3/4" if not
please advise: _____

* Standard Leg Length
for non mortised edge
is 1 1/4" if not please
advise: _____

* Standard Leg Length
for mortised edge
is 7/8" if not please
advise: _____

Note: Your door thickness is a nominal dimension. Doors can vary + or - 1/16" from the nominal dimension. When ordering, verify actual door thickness to assure a working fit of the door edge.

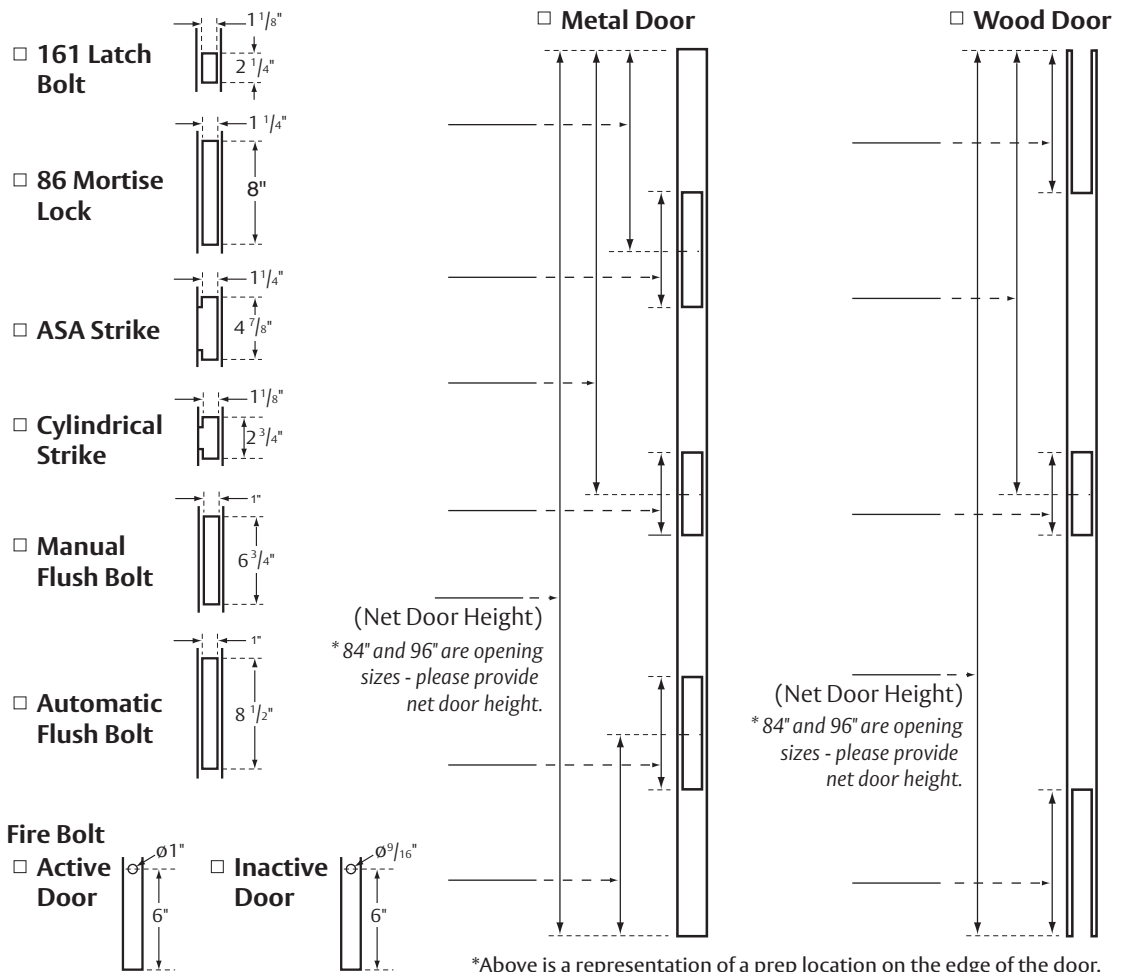

300 Main Street

Rockwood, Pennsylvania 15557

P: 800.458.2424 | F: 800.922.9212

www.assaabloydooraccessories.us | orders.rockwood@assaabloy.com