



# Wiegand Card Ordering Guide

**Base Model: WCCI-**

COMPANY:
CONTACT:
PHONE:
EMAIL:

**1) Style (check one)**

- 10 – 30 mil thickness
- 11- 37 mil thickness
- 14 – 47 mil thickness (tuff card)

**Multi-Technology Cards**

- 16 – 47 mil thickness, Wiegand + Proximity<sub>1</sub>
- 20 – 37 mil thickness, Wiegand + HF Inlay<sub>1</sub>

**2) Reader Type (check one)**

- S – Swipe Reader A<sup>2</sup>
- I – Insert Reader A

**3) Artwork (check one)**

- C – Custom, state Art File #<sup>3</sup>
- S – Secura Key Artwork
- N – None, state Art File#<sup>4</sup>

**4) Numbering, (check one)<sup>5</sup>**

- M – ID Only Matches internal code
- N – ID Only, does Not match internal code<sup>7</sup>
- F – ID: matching, add Facility Code
- S – ID: Matching, Add F.C. and SO No.<sup>6</sup>
- O – ID: Matching, Omit FC and add SO No.

**5) Number Location (check one)**

- B – Back
- F - Front

**6) Finish (check one)**

- GA – Glossy All sides
- MA – Matte All sides
- GB – Glossy Back (matte front)
- GF – Glossy Front (matte back)

**7) Mag Stripe (check one)**

- B – Mag stripe on back<sup>8</sup>
- F– Mag Stripe on front
- N – No Mag Stripe


**8) Mag Stripe Location (check one)**

- T – Top of Card
- B – Bottom of Card
- N – No Mag Stripe

**9) Slot Punch (check one)<sup>9</sup>**

- P – Portrait Slot Punch<sup>10</sup>
- L– Landscape Slot Punch
- N – No Slot Punch

**NOTICE:**  
**THIS FORM IS NOT A SUBSTITUTE FOR A PURCHASE ORDER. YOU MAY SEND WITH YOUR P.O. FOR CLARIFICATION ONLY.**  
**PLEASE RETURN FORM BY: FAX: 818-882-7052 Or EMAIL: [CUSTOMERSERVICE@SECURAKEY.COM](mailto:CUSTOMERSERVICE@SECURAKEY.COM)**

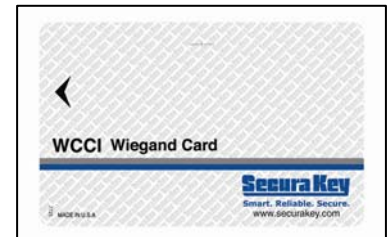

Enter your final card options from check boxes above. **ALL BOXES MUST BE FILLED IN. (Example: WCCI20SNMBGABTN)**  
 You may either select from the drop down lists, or hand write your final selections in the blank boxes.

FINAL PART NO.	STYLE	READER TYPE	ARTWORK	NUMBERING	NUMBERING LOCATION	FINISH	MAG STRIPE	MAG STRIPE LOCATION	SLOT PUNCH
WCCI	Select 1:	Select 1:	Select 1:	Select 1:	Select 1:	Select 1:	Select 1:	Select 1:	Select 1:
WCCI									

**Wiegand Programming Information**

Bit Format Numbers: \_\_\_\_\_ (ex: 26 bit)      Artfile # \_\_\_\_\_  
 Facility Code: \_\_\_\_\_ (ex: 144)  
 Internal Card no Start: \_\_\_\_\_ Stop: \_\_\_\_\_  
 External Card no Start: \_\_\_\_\_ Stop: \_\_\_\_\_  
 Special Instructions: \_\_\_\_\_

<sup>1</sup> HF inlay can be Secura Key e\*Tag, and most other 13.56 MHz technologies except iCLASS (*Indicate type in Special Instructions*).

<sup>2</sup> Determines location of code strip to work with specific reader type. Swipe readers will read insert-type cards.

<sup>3</sup> For new artwork files, contact Customer Service for artfile number, lead times and cost.

<sup>4</sup> Blank = AF 7883, Directional Arrow = 4435, Slot Punch targets = 5816. All cards will have a small Secura Key Logo and an artfile number printed on the back of the card.

<sup>5</sup> Laser-engraved numbering is standard. Zero-gap numbering is not available. A list of numbering gaps and fill-in cards is provided with every order.

<sup>6</sup> SO = Sales Order Number – this is highly recommended and very helpful to get correct PN when reordering cards.

<sup>7</sup> Specify number offset in Programming Information

<sup>8</sup> Standard Mag Stripe is 2-track, 2750 OE, contact customer service for other types

<sup>9</sup> Slot punching prior to dye sub printing is not recommended.

<sup>10</sup> Portrait Slot punch will not work in Swipe reader, only for Insert reader