




SL308 Continuous Edge Guard

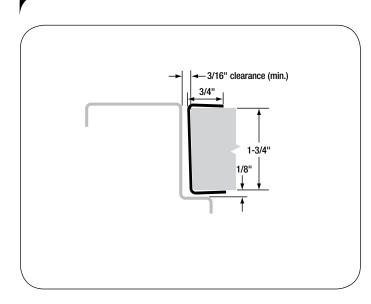

MATERIAL: 16 gauge stainless steel.

LENGTHS: 79", 83", 85", 95" and 119" lengths standard for nominal door heights. Custom lengths are available.

FINISH: US32D satin stainless steel (630).

FASTENERS: #10 x 1-1/4" 304SS Phillips flathead undercut sheet metal screws are provided as a standard pack. Adjusta-Screw[™] fasteners optional at extra cost.

ORDER: Specify edge guard length. Specify square or beveled door edge.

| SL308 EDGE GUARD SCREW COUNT | |
|------------------------------|-------------|
| HINGE LENGTH | DOOR SCREWS |
| 79" | 7 |
| 83" | 8 |
| 85" | 8 |
| 95" | 9 |
| 119" | 11 |

SL308 Continuous Edge Guard



SELECT Advantages



CORROSION-RESISTANT STAINLESS STEEL

Stainless steel construction creates a tough, highly secure opening.



VARIETY OF FINISHES

Available in polished, brushed and painted finishes to match, contrast or accent your building's design.



3-HR. FIRE RATING

Fire-rated out of the package. No extra parts to buy or install. No liability worries.



ADJUSTA-SCREW™ FASTENERS

Remedy out-of-square doors and frames easily. Correct fit variances up to 3/8" along full length of door. Available at extra cost.

