





TEMP-CONV 7500-175
HiTower CONVERSION
TEMPLATE – 1-3/4" - 2" FRAMES

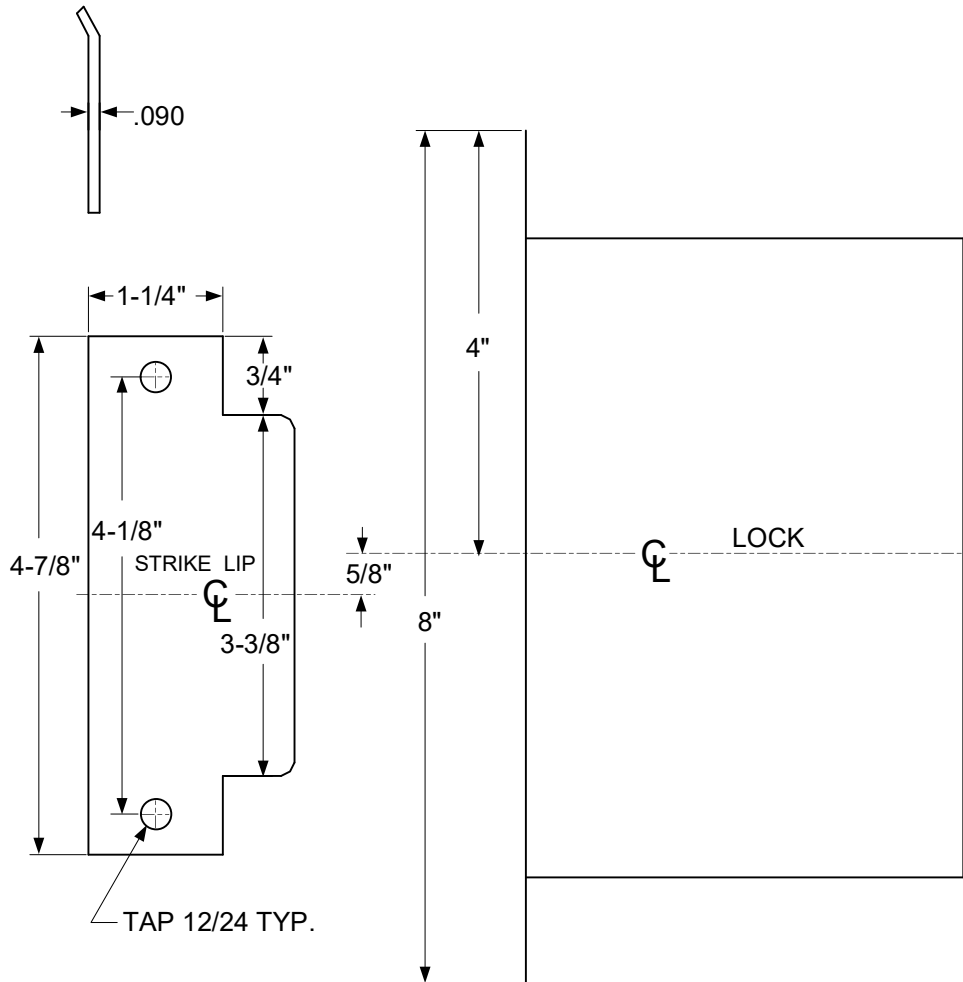

NOT TO SCALE

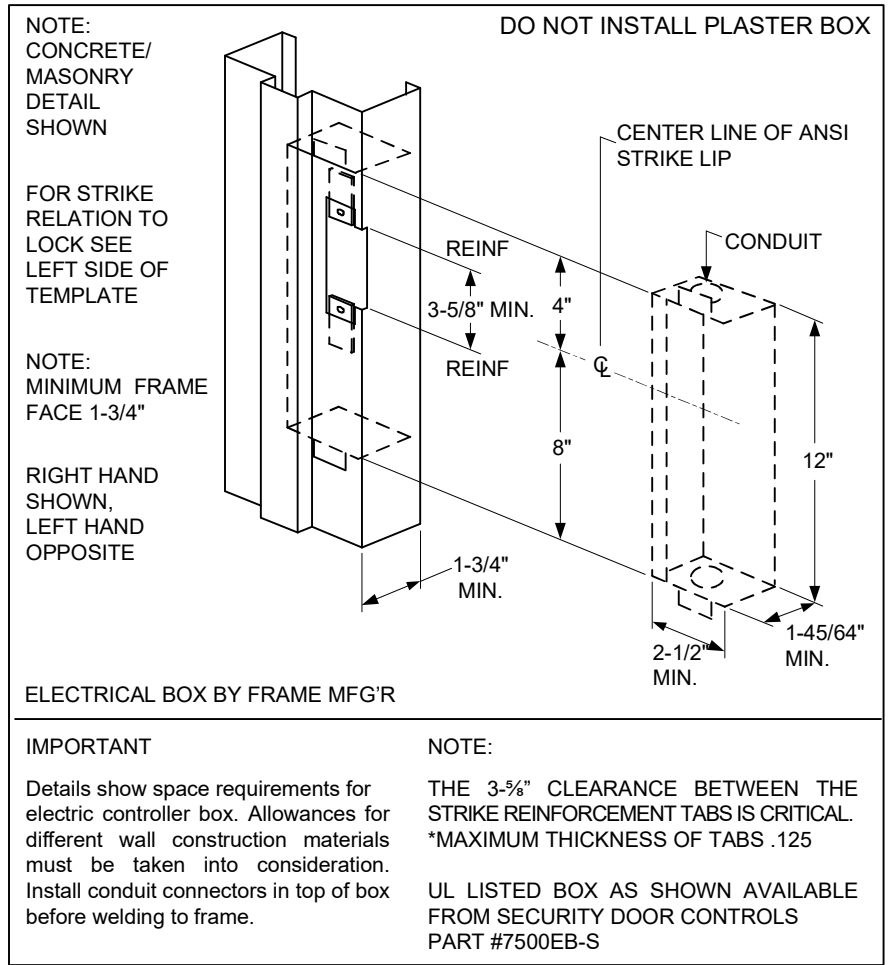

IMPORTANT
 Details show space requirements for electric controller box. Allowances for different wall construction materials must be taken into consideration. Install conduit connectors in top of box before welding to frame.

NOTE:
 THE 3-5/8" CLEARANCE BETWEEN THE STRIKE REINFORCEMENT TABS IS CRITICAL. *MAXIMUM THICKNESS OF TABS .125
 UL LISTED BOX AS SHOWN AVAILABLE FROM SECURITY DOOR CONTROLS PART #7500EB-S

HOLES REQUIRED FUNCTIONS

CYL OUTSIDE ONLY	CYL BOTH SIDES
7550	7530

Door Prep. Only
 Identify the lock and manufacturer by letter prefix. Review proper manufactures template requirements for **door prep only**. See details far left and above for frame prep.

SOURCE #	MODEL #
ZY SDC	7500
A Falcon	MA581
O Yale	7130F L5
U Dorma	ML9080
V Marks	5EW