


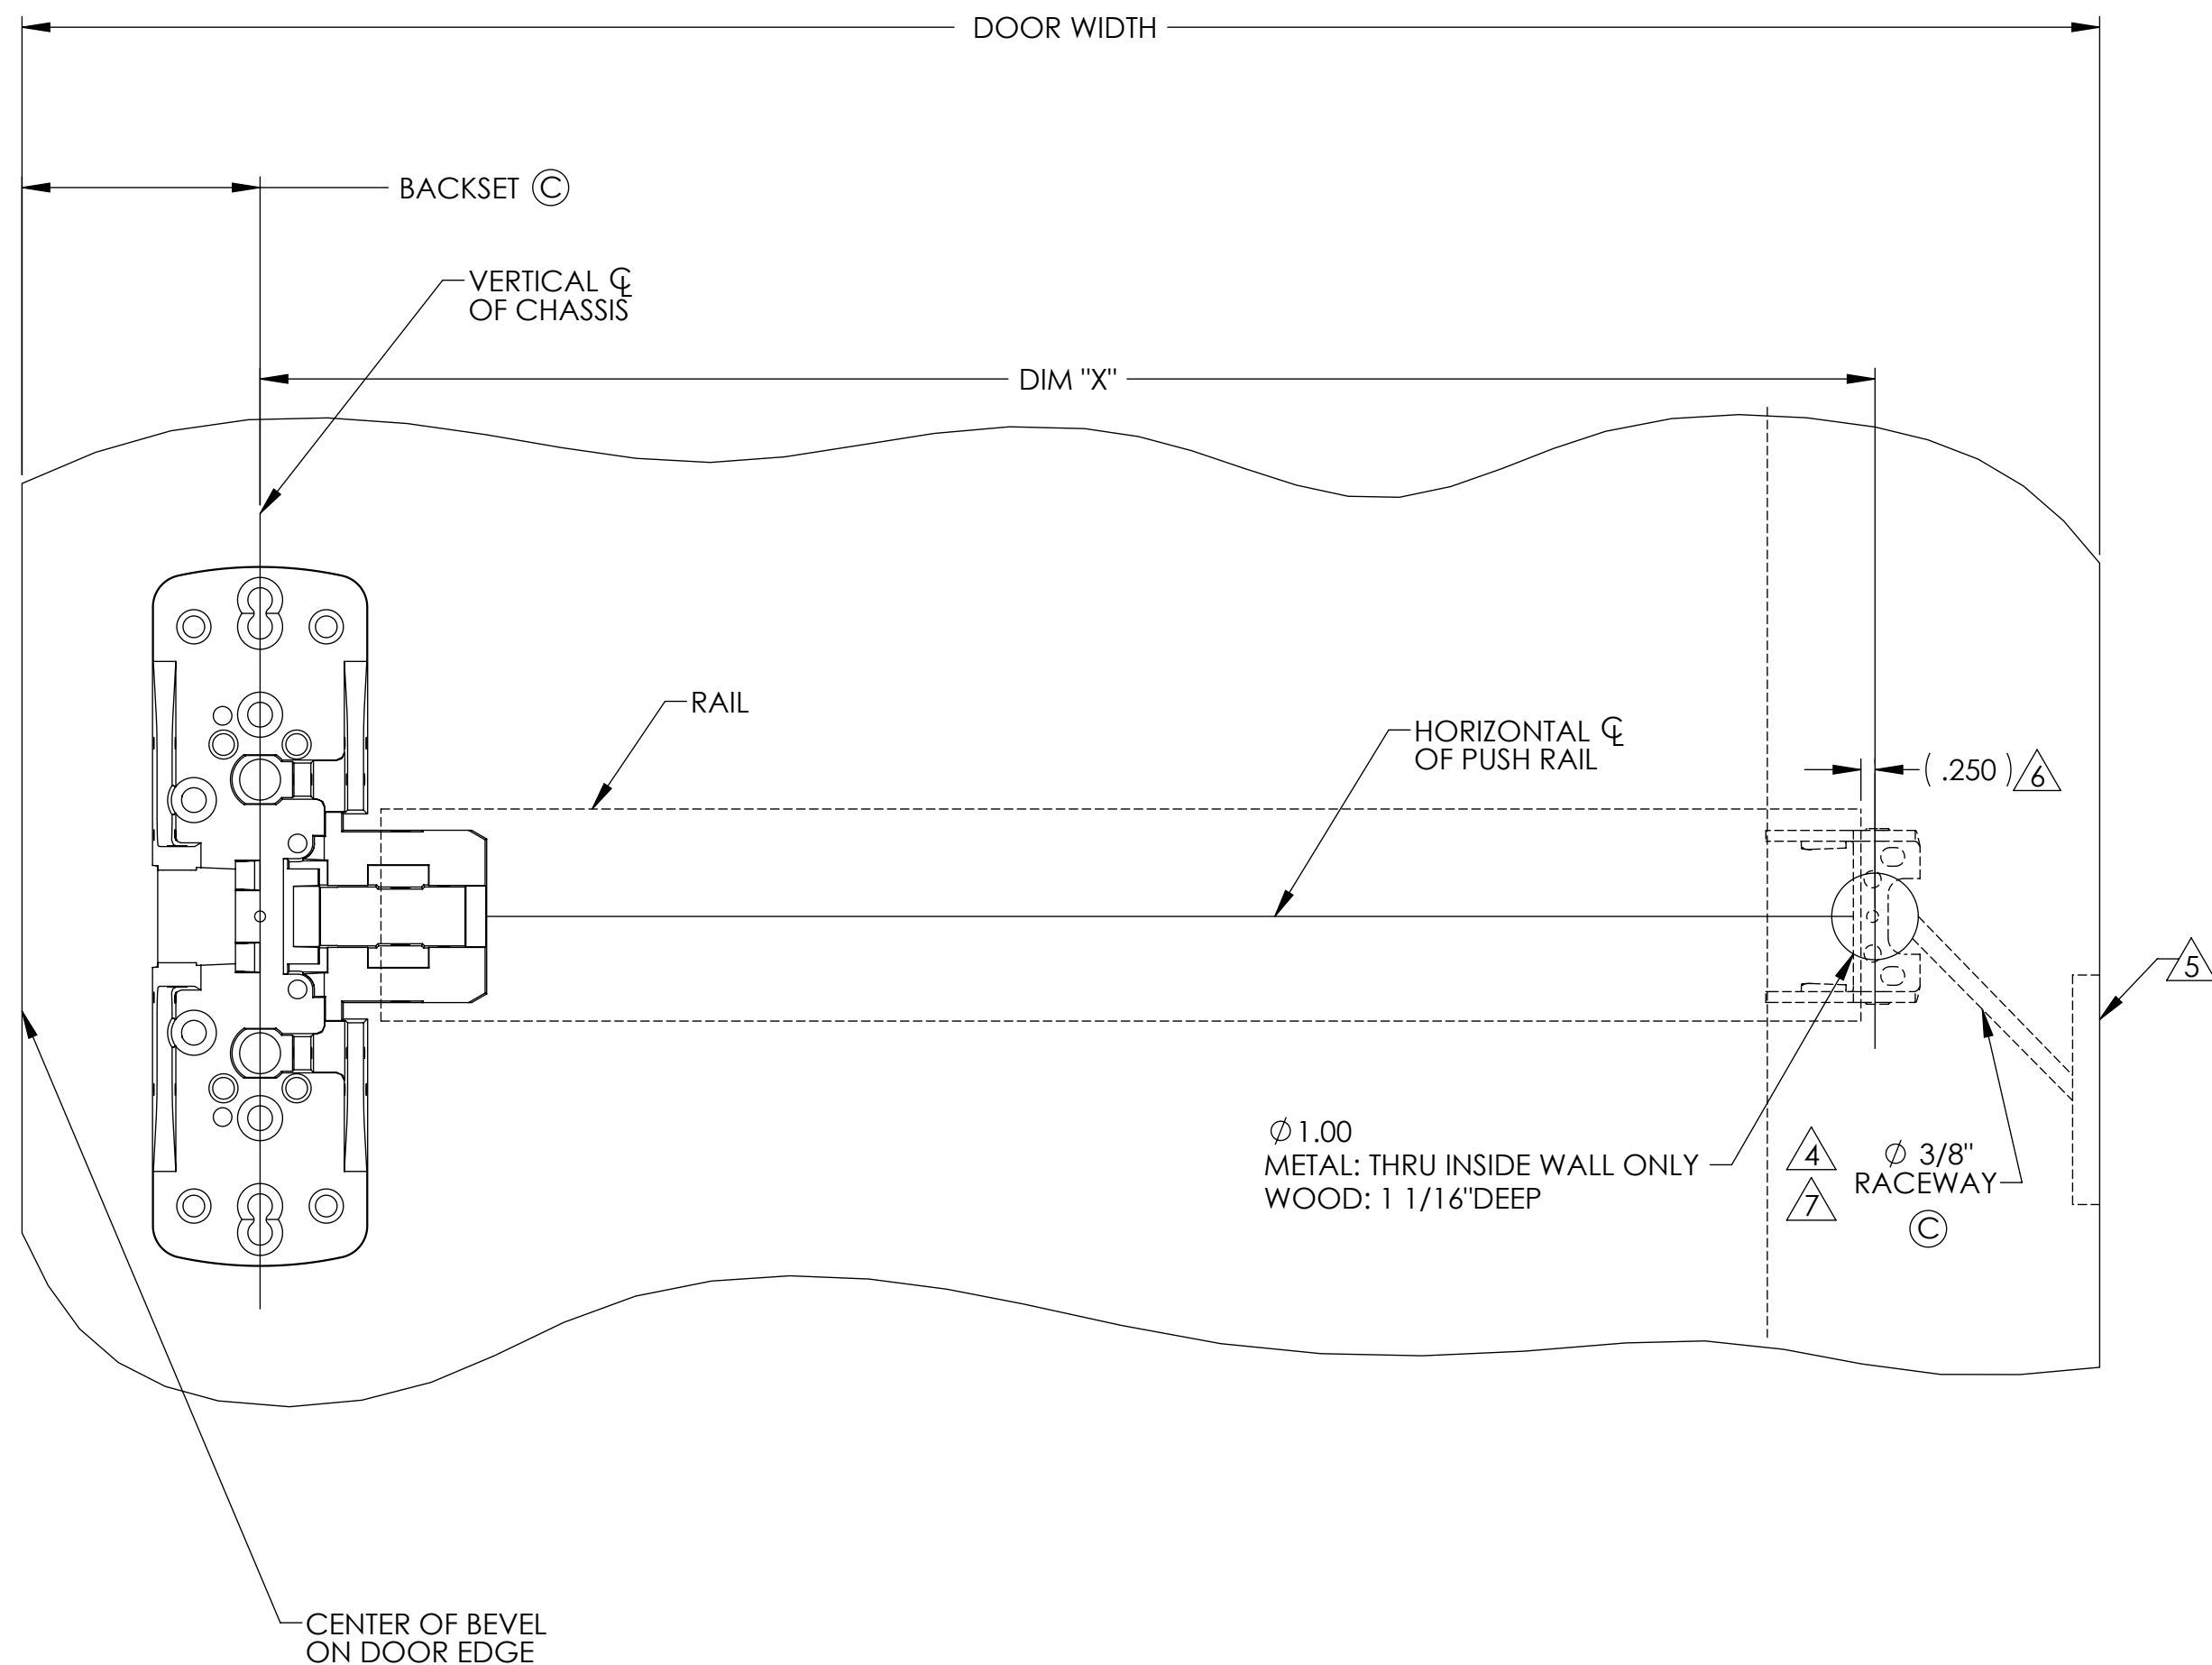

ELECTRIFIED EXIT DEVICE RAIL PREP LOCATION	
DIMENSION "X" CROSS- REFERENCE CHART	
DOOR WIDTH	DIM "X" FOR WIDE STYLE CHASSIS
48"	42.655"
47"	41.655"
46"	40.655"
45"	39.655"
44"	38.655"
43"	37.655"
42"	36.655"
41"	35.655"
40"	34.655"
39"	33.655"
38"	32.655"
37"	31.655"
36"	30.655"
35"	29.655"
34"	28.655"
33"	27.655"
32"	26.655"
31"	25.655"
30"	24.655"
29"	23.655"
28"	22.655"
27"	21.655"
26"	20.655"
25"	19.655"
24"	18.655"

AUTHORIZED 80 SERIES EXIT DEVICE PREFIX TEMPLATE AND INSTUCTION SHEET		
DESCRIPTION	PREFIX	INSTALLATION INSTUCTIONS
LATCH MONITOR SWITCH	53-	A7678
SIGNAL SWITCH RAIL	55-	A6808
ELECTRIFIED LATCH RETRACTION	56-	A7925
DELAYED EGRESS	57-	A7743
ELECTRIC DOGGING	58-	A6835
ELECTROGUARD	59-	A7690
ALARMED	AL-	A7224
BEACON	BT-	A7974
ILLUMINATED TOUCHPAD	TL-	A7711

- NOTES:
- FOR LOCATION OF VERTICAL AND HORIZONTAL ¢ , AND ADDITIONAL EXIT DEVICE PREP. REFER TO APPROPRIATE EXIT DEVICE TEMPLATE.
 - HARNESS ROUTES MAY DIFFER BY DOOR, CONSULT DOOR MANUFACTURES SPECS FOR ROUTES USED.
 - FOR ELECTROLYNX™ APPLICATIONS REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
 - 3/8" RACEWAY FOR ELECTROLYNX™ APPLICATIONS REFER TO MCKINNY TRANSFER DEVICE CATALOG.
 - CONSULT WITH POWER TRANSFER DEVICE MANUFACTURER AND DOOR MANUFACTURER FOR DOOR AND FRAME TEMPLATE DETAILS.
 - FOR MODIFIED RAIL LENGTHS; POSITION HOLE .250" BEYOND END OF RAIL.
 - DOOR MFG TO PROVIDE CLEARANCE IN REINFORCEMENT TO ALLOW INSERTION OF ELECTRICAL WIRES RUNNING BETWEEN RAIL AND ELECTRIC HINGE. MAKE PROVISIONS TO PROTECT WIRES FROM ABRASION.

SARGENT

ASSA ABLOY

Sargent Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DOOR MANUFACTURERS TEMPLATE:
ELECTRO - MECHANICAL
EXIT DEVICE RAILS(WIDE DESIGN)

RELEASE DATE
FEB 11, 2010
TEMPLATE NO.
4569 C