

TechMaster



Features

Keypad

- Display 16x2
- Green/red LED
- Buzzer
- Battery compartment
- Keypad test
- Automatic DST
- Dallas reader
- Power:
 - 9V alkaline battery
 - large battery box
 - power supply

Locks

- 2 Master
- 2 Manager
- 1 Override Manager
- 89 users
- Dynamic codes
- Codes expiry
- Multi-lock system
- Time delay 1-99 minutes
- Open window 1-19 minutes
- Variable time delay
- Dallas keys
- Silent alarm
- Remote disable opening
- Remote time delay override
- Penalty
- Input/output interface
- Remote management (TCP/IP, RS485)
- Dual mode users in groups
- Up to 3 weekly time lock
- Opening and closing periods
- Immediate time lock
- Temporary time lock
- Audit trail with time and date (up to 6000 events)



RotoBolt



StraightBolt



SpringBolt





MotorLock





Motor SpringBolt



TechMaster

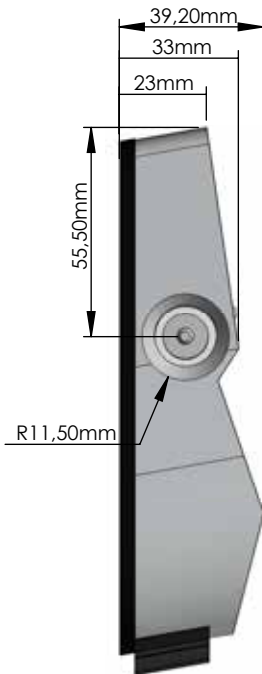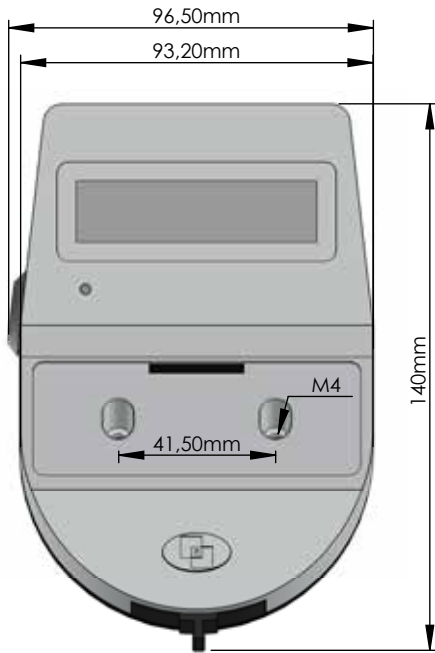



RotoBolt





StraightBolt

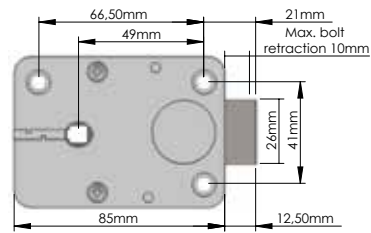



SpringBolt

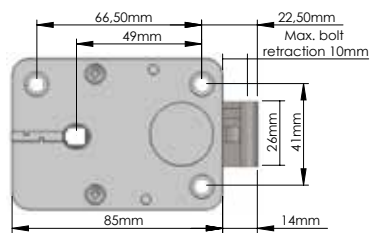

MotorLock

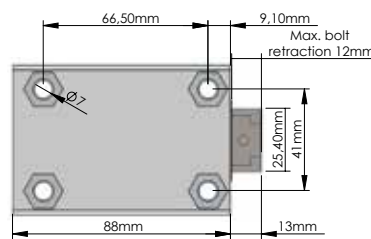

Motor SpringBolt

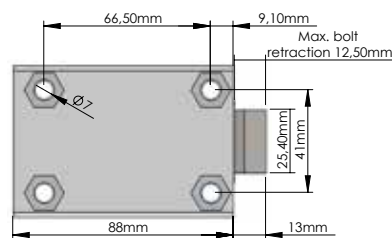

GLOBAL HEADQUARTERS

Tecnosicurezza
Via C. Battisti, 276
37057 S.Giovanni Lup.(VR)
ITALY
info@tecnosicurezza.it
www.tecnosicurezza.it

USA HEADQUARTERS

Tecnosicurezza
50, Thomas Lane
Versailles, KY 40383
USA
info@usatecno.com
www.usatecno.com

SPAIN HEADQUARTERS

Tecnosicurezza
C/Menor, 4 - Nave 10, Pol Ind. "La Miña"
28770 Colmenar Viejo
SPAIN
info@tecnosicurezza.es
www.tecnosicurezza.es