




IMPORTANT





Templates must be printed without size modifications and verified for dimensional accuracy.

- Before printing, select the printing options necessary to ensure that copies are produced without size adjustments.
- After printing, measure the dimensions indicated on the template to ensure correct scale.

FOLD HERE AND
ALIGN TEMPLATE
ON HIGH EDGE OF
DOOR BEVEL.

FOLD HERE AND
ALIGN TEMPLATE
ON HIGH EDGE OF
DOOR BEVEL.

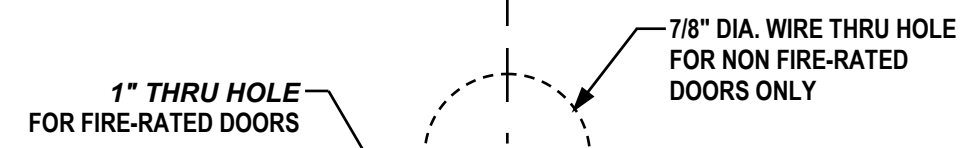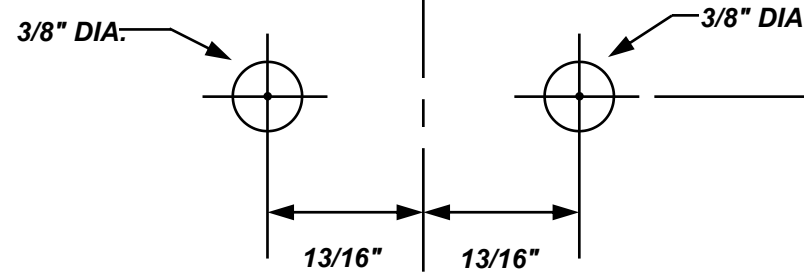

1/8" MIN. DEPTH NOTCH
BOTH SIDES OF DOOR




2 1/8" DIA.

5 13/32"

3 9/16"

2 5/8"

BORE 1" DIA.
LATCH HOLE



2 9/16"

5/32"

1 3/4" (45mm)

1 3/8" (35mm)

1 3/4" (45mm)

1 3/8" (35mm)

2 3/4"

2 15/32"

2 3/4"

1 3/8" (35mm)

**FOR INSTALLING
ALL TRILOGY
CYLINDRICAL
LOCK MODELS**



ALARM LOCK
345 Bayview Avenue
Amityville, New York 11701
For Sales and Repairs 1-800-ALA-LOCK
For Technical Service 1-800-645-9440
Publicly traded on NASDAQ Symbol: NSSC
© ALARM LOCK 2009