


THE 'BOLT' STRIKE SOLUTION THE LATCHBOLT MONITORING SOLUTION

4801 - "Bolt" Strike

- For use with the Yale Squarebolt® or Corbin Russwin Securebolt™ in new or replacement installations with wood or metal door frames.
- Use with surface mounted rim device with up to 1" throw.
- Cavity Opening -
Height: 1 17/32"
Width: 1 5/32"
- 6-Pin Anchor system provided to handle the toughest installations.
- Electronics and BHMA rating same as the 4800 - see facing page.

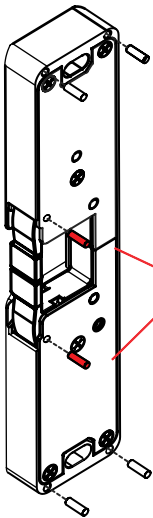

***Must Install
2 middle
pins on the
4801/4801LB**



Latchbolt Monitoring (LB Option)



4800 Series

- IR optical sensor
- Single pole, double throw, form "C" Relay, rated at 1-amp at 12-24 AC-DC
- N/O and N/C relay contacts
- Module power source
- 12-24 DC
- Current consumption is:
12v: standby 12.7ma
activate 22.8ma
24v: standby 19.4ma
activate 34.4ma
- All other features are the same as the base model.

4801-32D (Satin Stainless Steel - BHMA630)

The following finishes are:

- **4801-US3** (Bright Brass - BHMA605)
- **4801-US4** (Satin Brass - BHMA606)
- **4801-US10** (Satin Bronze - BHMA612)
- **4801-US10B** (Dark Bronze - BHMA613)
- **4801-32** (Polished Stainless Steel - BHMA629)

See Page 18 for options.

Add "LB" to any 4800 series electric strike

Example:

- **4800LB-32D**
- **4850LB-10B**
- **4801LB-32**