


V37 series

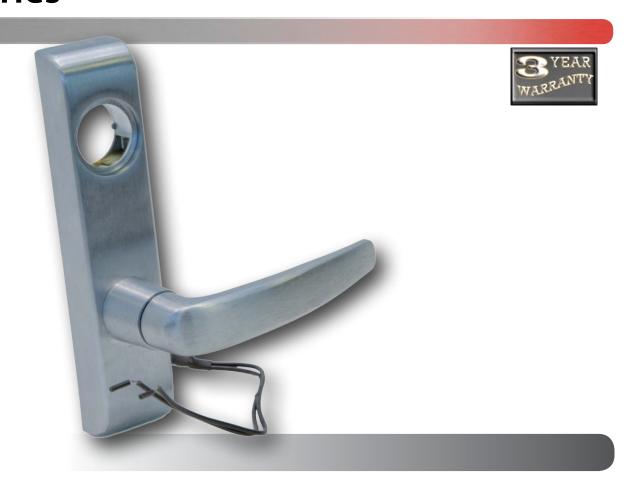

The easier and more affordable solution

The Command Access electronic modification of the **Von Duprin 370 series exit trim** is perfect for stairwell conditions or applications where electric pullback of the exit device's latchbolt is cost prohibitive or not required. This is especially practical in applications where fire/life safety codes require "fail safe" condition which is not an option with electrified latch pullback devices. Because the current draw is quite low there is no need for a more expansive power supply to provide the surge current. These trims are purchased as modifications only.

U.S. Customer Support **1-888-622-2377**

Visit our website for more details www.CommandAccess.com

Canada Customer Support 1-855-823-3002



Models Available

MDV37EL-Storeroom

Outside lever locked Fail Safe (EL) electronically. Switched power allows outside lever to retract latch(es). Outside key momentarily unlocks outside lever to retract latch(es). Inside push pad is always free for immediate egress.

MDV37EU- Storeroom

Outside lever unlocked Fail Secure (EU) electronically. Switched power allows outside lever to retract latch(es). Outside key momentarily unlocks outside lever to retract latch(es). Inside push pad is always free for immediate egress.

FEATURES:

- Continuous duty solenoids used to insure trouble-free operation
- Internally mounted solenoid to ease installation (no special door prep required)
- 3-year "no hassle" warranty

OPTIONS:

- Available Fail Safe (Electrically Locked) or Fail Secure (Electrically Unlocked)
- Voltage options 12V or 24V (AC/DC)
- REE Request to Enter switch available
- CRU2 Current Reduction Unit to improve solenoid life in "continuously on" applications

SPECIFICATIONS:

- Operating Voltage 12 or 24VAC/DC (+or- 10%) (must specify 12 or 24 volts when ordering)
- Amperage 12V = 250 mA / 24V = 150 mA
- Solenoid coil resistance $12V = 49 \Omega / 24V = 159 \Omega$

Model No.	Notes:		
Customer:	Job No./Name:	Date:	Provided by: