


NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER: 20441_a

DATE: 05-23-13

01 Mod Trim

VON DUPRIN

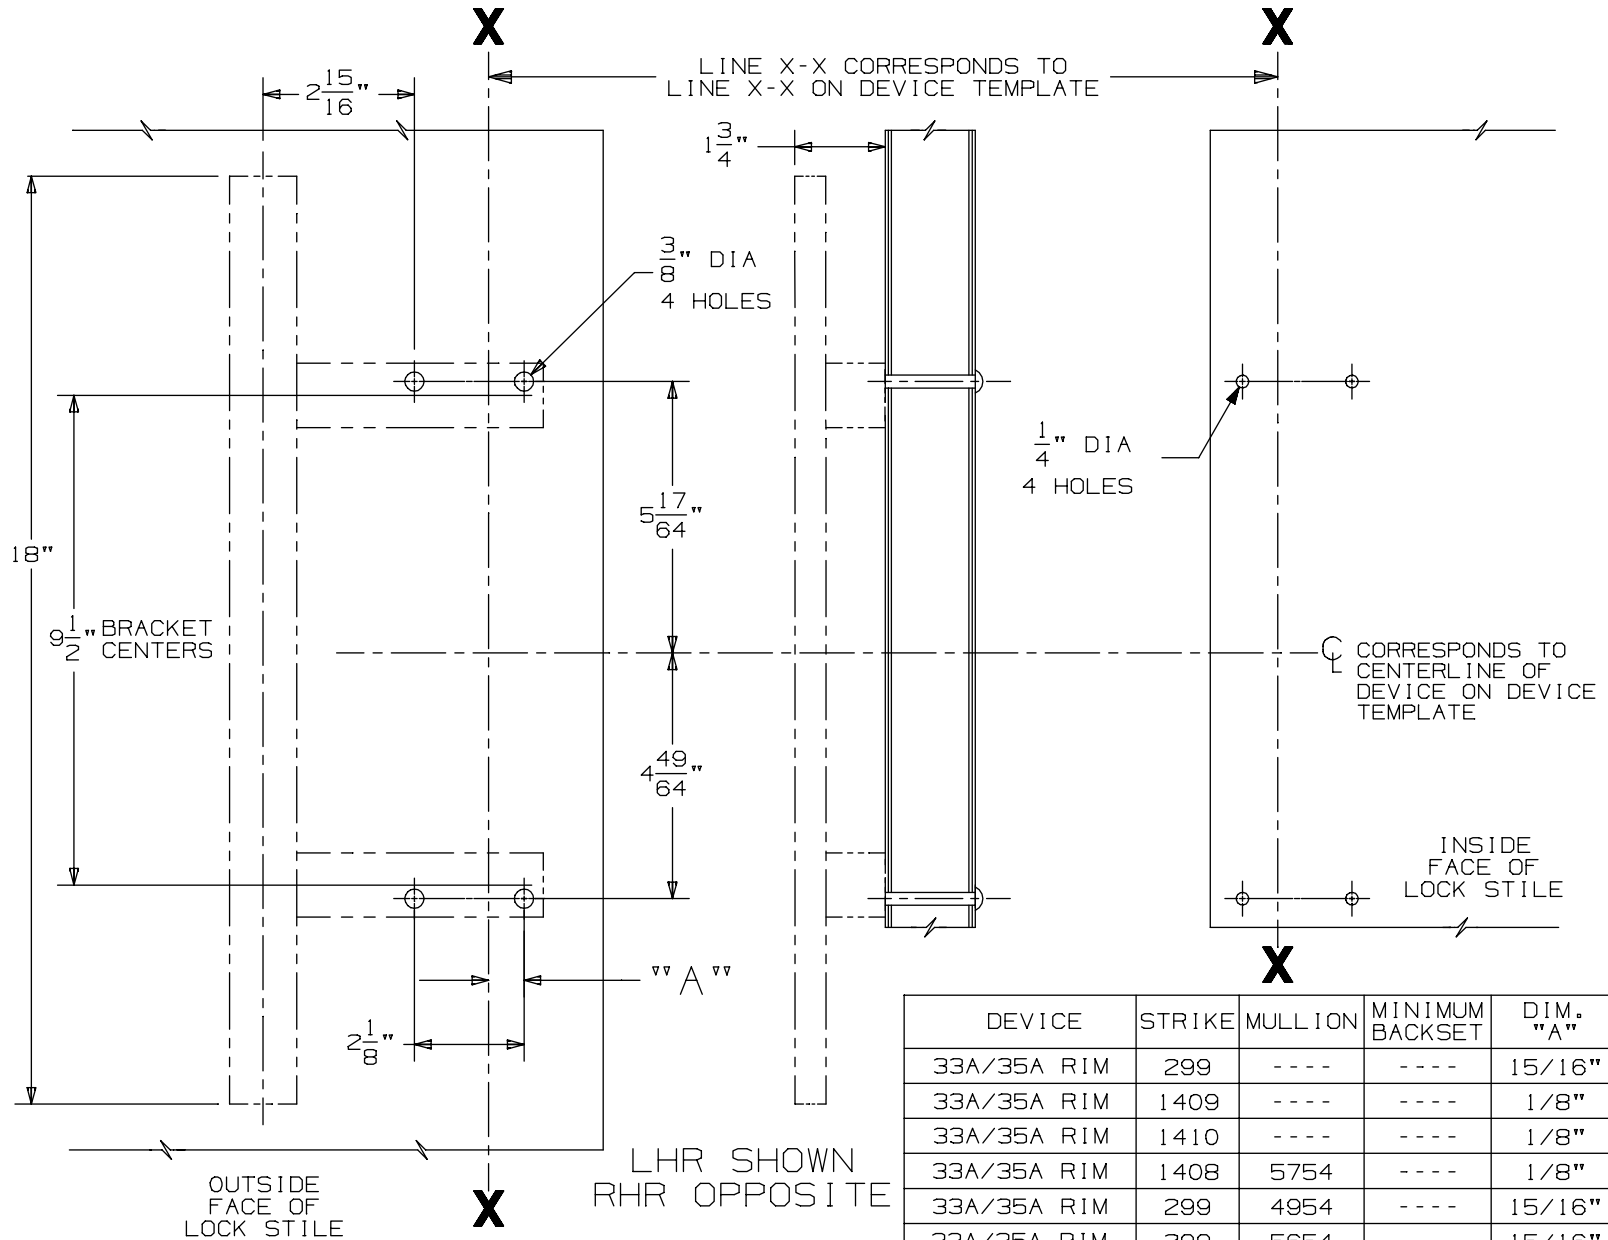

FOR CUTOUT ON INSIDE FACE OF DOOR SEE DEVICE TEMPLATE.

FOR STILES WIDER THAN MINIMUM LISTED, DIM. "A" MAY BE ADJUSTED ACCORDINGLY IF DESIRED. THRU BOLTS MUST NOT INTERFERE WITH CONCEALED VERTICAL RODS ON 33/3547A, 33/3548A, 33/3547A-F & 33/3548A-F DEVICES.

DEVICE	STRIKE	MULLION	MINIMUM BACKSET	DIM. "A"	MINIMUM STILE
33A/35A RIM	299	----	----	15/16"	3 1/2"
33A/35A RIM	1409	----	----	1/8"	3 1/2"
33A/35A RIM	1410	----	----	1/8"	3 1/2"
33A/35A RIM	1408	5754	----	1/8"	3 1/2"
33A/35A RIM	299	4954	----	15/16"	3 7/8"
33A/35A RIM	299	5654	----	15/16"	3 1/2"
33A/35A RIM	1606	1654	----	1/2"	3 7/8"
3327A/3527A	----	----	1 7/8"	11/16"	3 3/4"
33/3527A-F	----	----	1 7/8"	11/16"	3 3/4"
33/3547A/48A	----	----	1 7/8"	11/16"	3 3/4"
33/3547A/48A-F	----	----	2 3/4"	11/16"	4 3/8"