

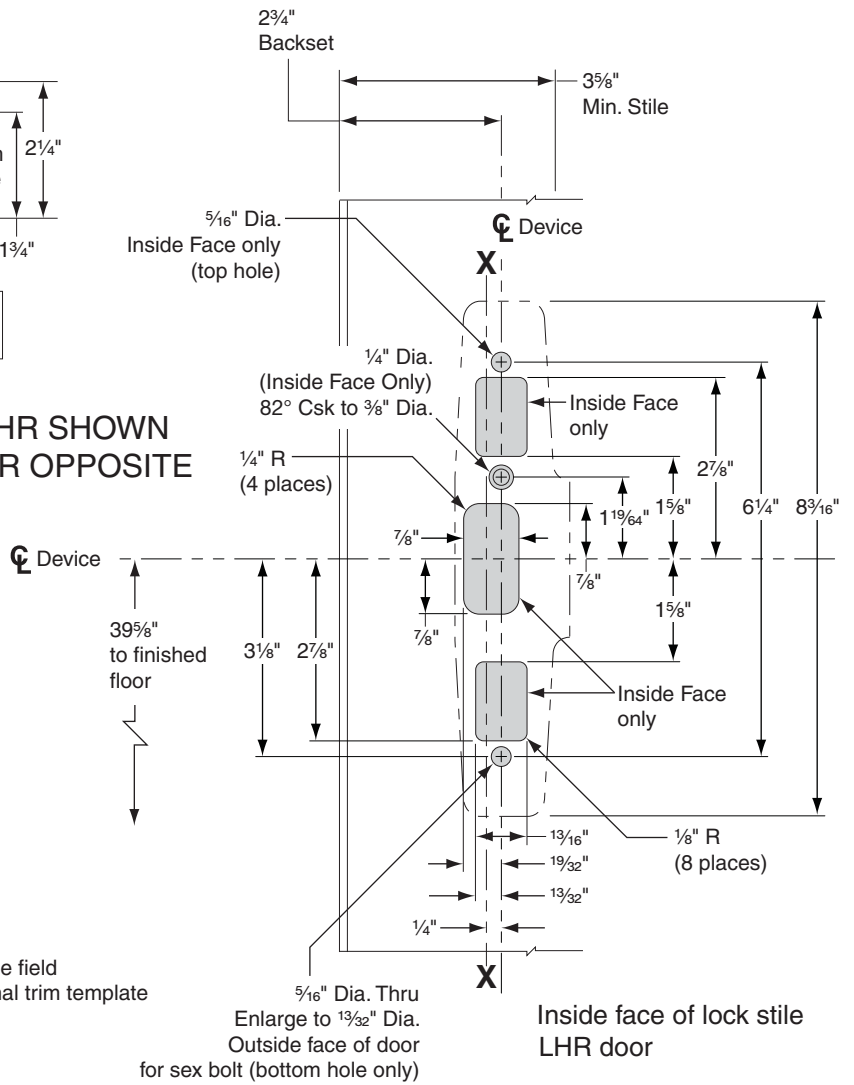


- Glass bead kit available when required
- It is recommended the mounting holes be prepared in the field
- For outside trim preparation, when required add additional trim template

LHR SHOWN  
RHR OPPOSITE

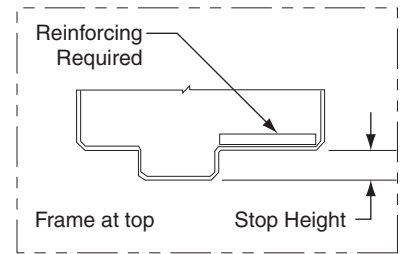

Inside face of lock stile  
LHR door

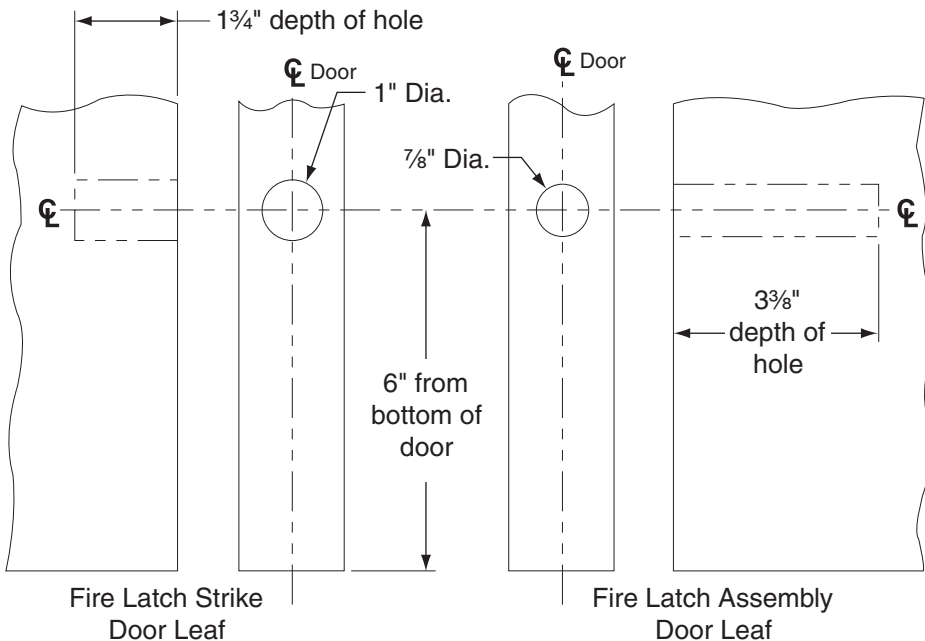

33/3549A-F-LBL  
HOLLOW METAL DOOR FIRE APPLICATION  
CONCEALED VERTICAL DEVICE

**VON DUPRIN**<sup>®</sup>

NOTE: SEE MASTER SHEET NO. 10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER: 941358\_b

DATE: 10-27-15