

# 360T, 360L, 360T-BE, 360L-BE CONTROL

# VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

40080\_f


DATE:  
04-13-20

LINE X-X CORRESPONDS TO  
LINE X-X ON DEVICE TEMPLATE

1 5/8" DIA CLEARANCE REQUIRED ON  
INTERNAL LOCK STILE FEATURES FOR  
ROTATION OF MORTISE CYLINDER CAM  
IN AREA SHOWN BELOW. OMIT FOR "BE".

LHR SHOWN  
RHR OPPOSITE

CORRESPONDS  
TO  
CENTER LINE  
OF DEVICE ON  
DEVICE  
TEMPLATE

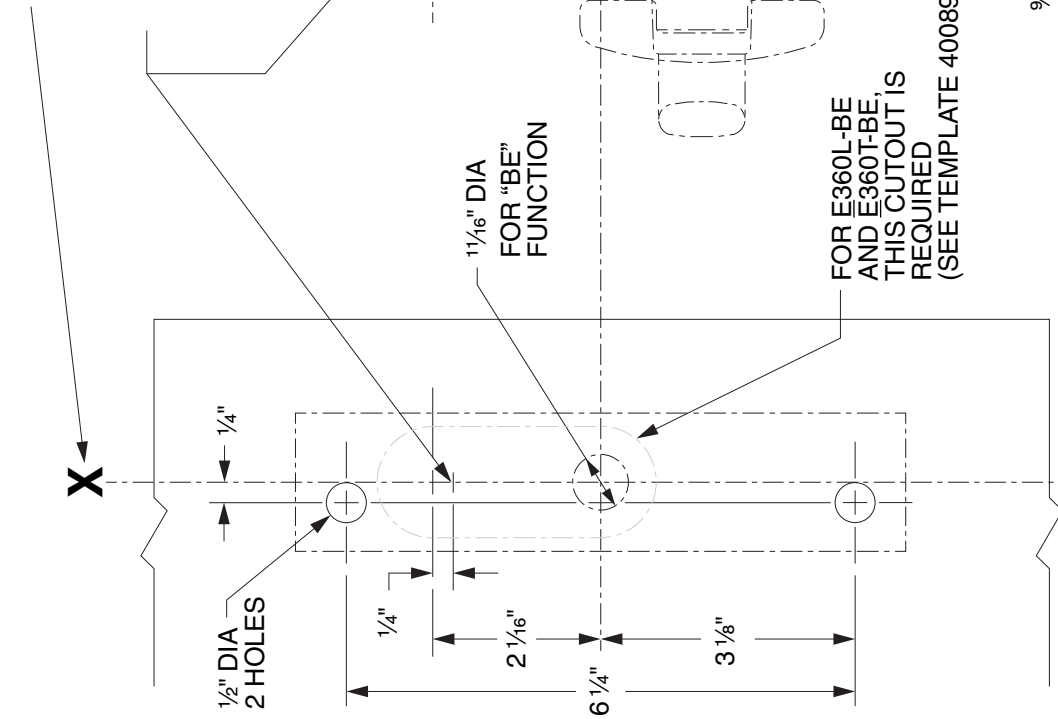

DEVICE APPLICATION SCHEDULE	
33A/35A RIM DEVICE	FOR CUTOUT ON INSIDE FACE OF DOOR SEE DEVICE TEMPLATE
33/3527A VERTICAL ROD DEVICE	
33/3527A-F VERTICAL ROD DEVICE	
33/3547A VERTICAL ROD DEVICE	
33/3547A-F VERTICAL ROD DEVICE	
33/3548A VERTICAL ROD DEVICE	
33/3548A-F VERTICAL ROD DEVICE	
33/3549A VERTICAL CABLE DEVICE	
33/3549A-F VERTICAL CABLE DEVICE	

X

X

INSIDE  
FACE OF  
LOCK STILE

X

OUTSIDE  
FACE OF  
LOCK STILE