



WIDE STILE SHOWN

STD APPLICATION	
3/8" DIA. THRU ENLARGE TO 13/32" DIA. OUTSIDE FACE OF DOOR FOR SEX BOLTS 2 HOLES	
243 & E 243 TRIM	
#12-24 TAP INSIDE FACE OF DOOR 2 HOLES	

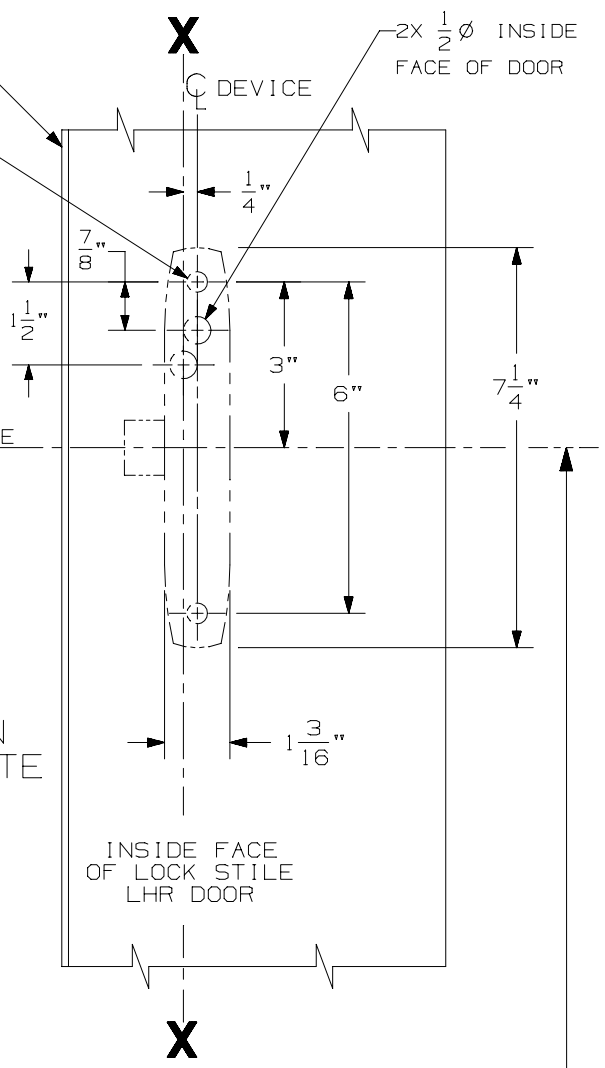

SINGLE DOOR INSTALLATION		
STRIKE	DIMENSION "B"	MIN. STILE
⑦ 299	1 19/32"	2 13/16"
264	1 11/32"	2 9/16"
1606	1 5/32"	2 3/8"
⑦ 1409 & 1439	25/32"	1 3/4"
1410	25/32"	1 3/4"

LHR SHOWN  
RHR OPPOSITE

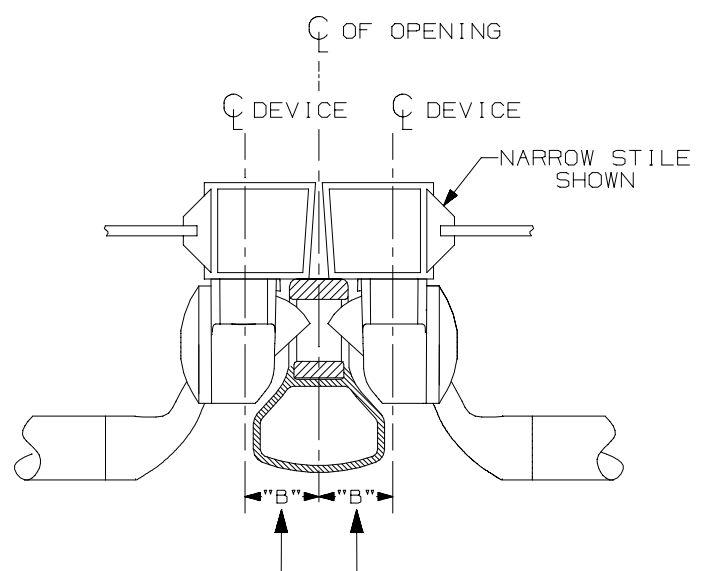

SINGLE DOOR OPENING  
39 13/16" TO FINISHED FLOOR.

DOUBLE DOOR OPENING  
WITH VON DUPRIN MULLION  
39 11/16"

DOUBLE DOOR INSTALLATION WITH VON DUPRIN MULLIONS			
MULLION	STRIKE	DIMENSION "B"	MIN. STILE
⑦ 5654	299	2 5/32"	2 3/4"
⑦ 5654	264	1 29/32"	2 1/2"
⑦ 4954	299	2 19/32"	3 3/16"
4954	264	2 11/32"	2 15/16"
1654	1606	2 5/32"	2 3/4"
5754	1408	1 9/32"	1 3/4"

CROSSBAR 36 13/16" FROM FINISHED FLOOR

FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED, SEE ADDITIONAL TRIM TEMPLATE.

## 55NL Series Rim Device (Metal Door)

# VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

10062\_b

DATE:  
02-12-18