


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10160

TYPE 161 STOCK HOLLOW METAL DOOR

TYPE 86 STOCK HOLLOW METAL DOOR

NOTE: BACKSET IS ALWAYS 2 3/4".
SEX BOLTS REQUIRED FOR TOP &
BOTTOM LATCH CASE 7/32 DIA
INSIDE 3/8 DIA OUTSIDE

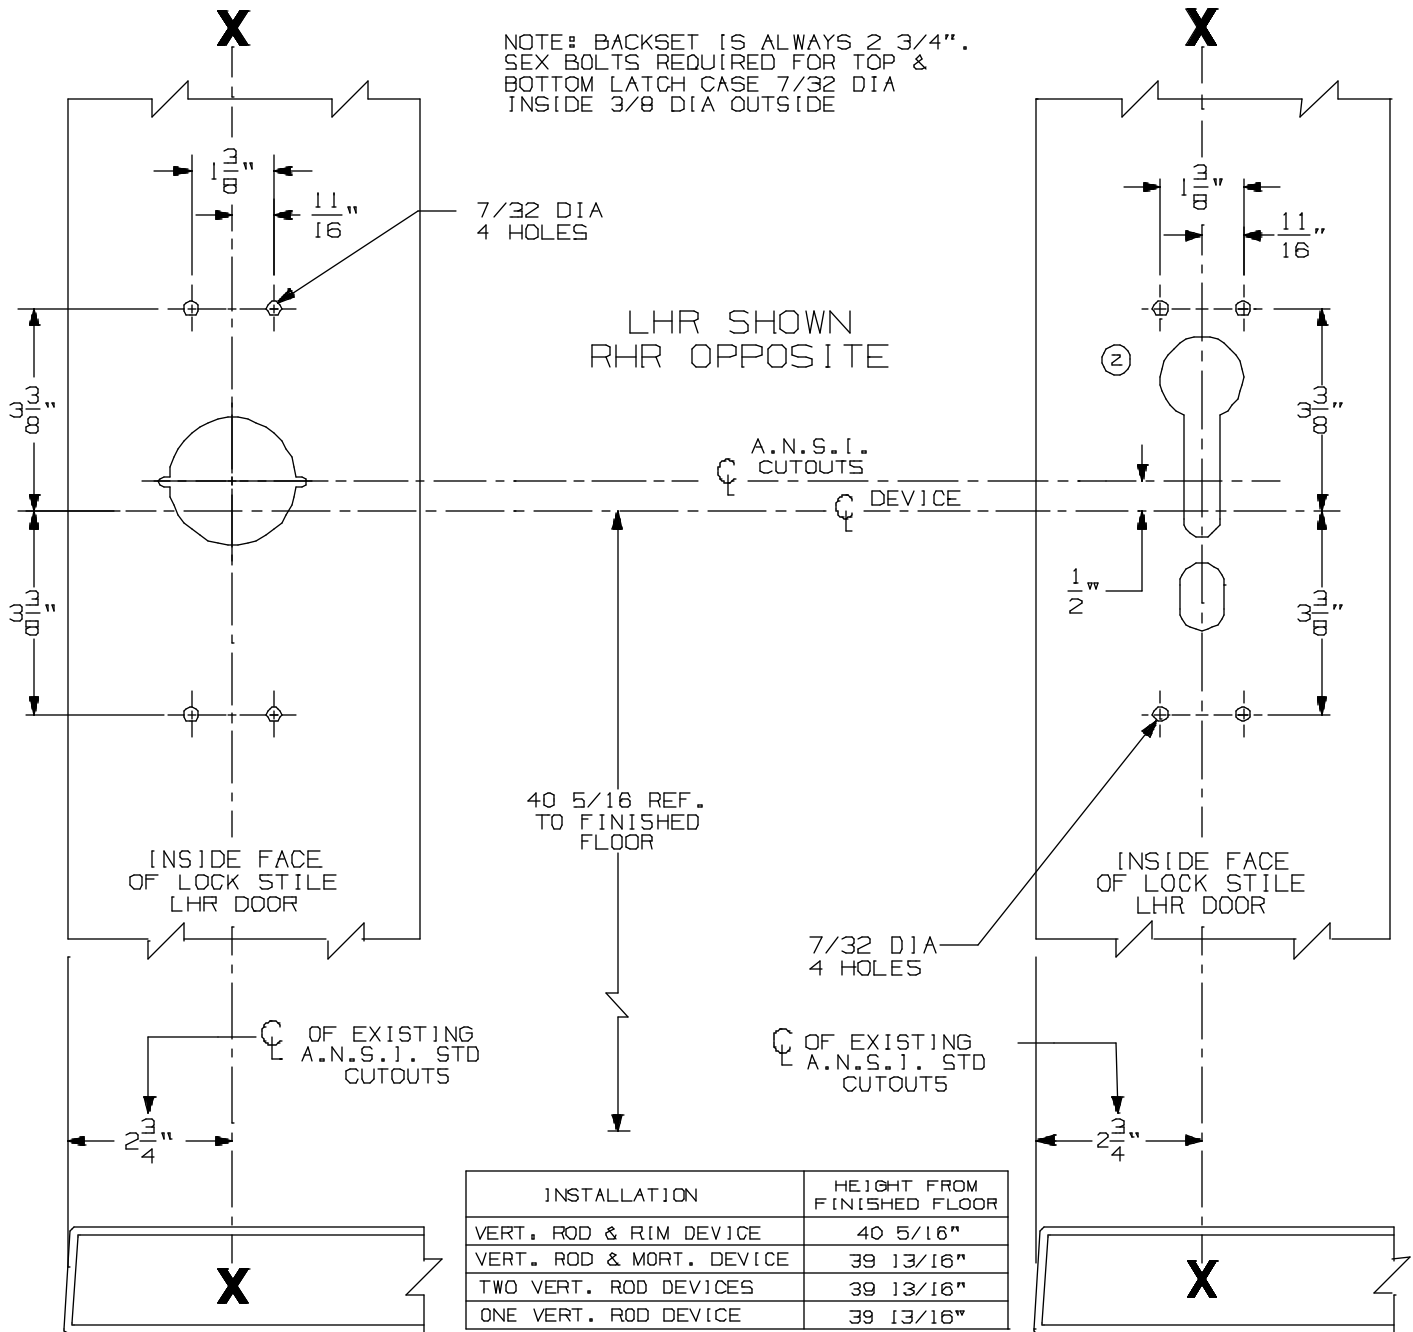

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS
SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE
AND LOCATION OF THESE CUTOUTS.

FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED,
SEE ADDITIONAL TRIM TEMPLATE.

8827EO & 8827DT Vertical Rod Devices w/ 880
Trim for Stock Hollow Metal Applications

VON DUPRIN

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE
NUMBER:

10199_a

DATE:
05-16-13