


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10161

TYPE 161 STOCK HOLLOW METAL DOOR

TYPE 86 STOCK HOLLOW METAL DOOR & STD DOOR

NOTE: BACKSET IS ALWAYS 2 3/4".
SEX BOLTS REQUIRED FOR TOP &
BOTTOM LATCH CASE 7/32 DIA
INSIDE 3/8 DIA OUTSIDE

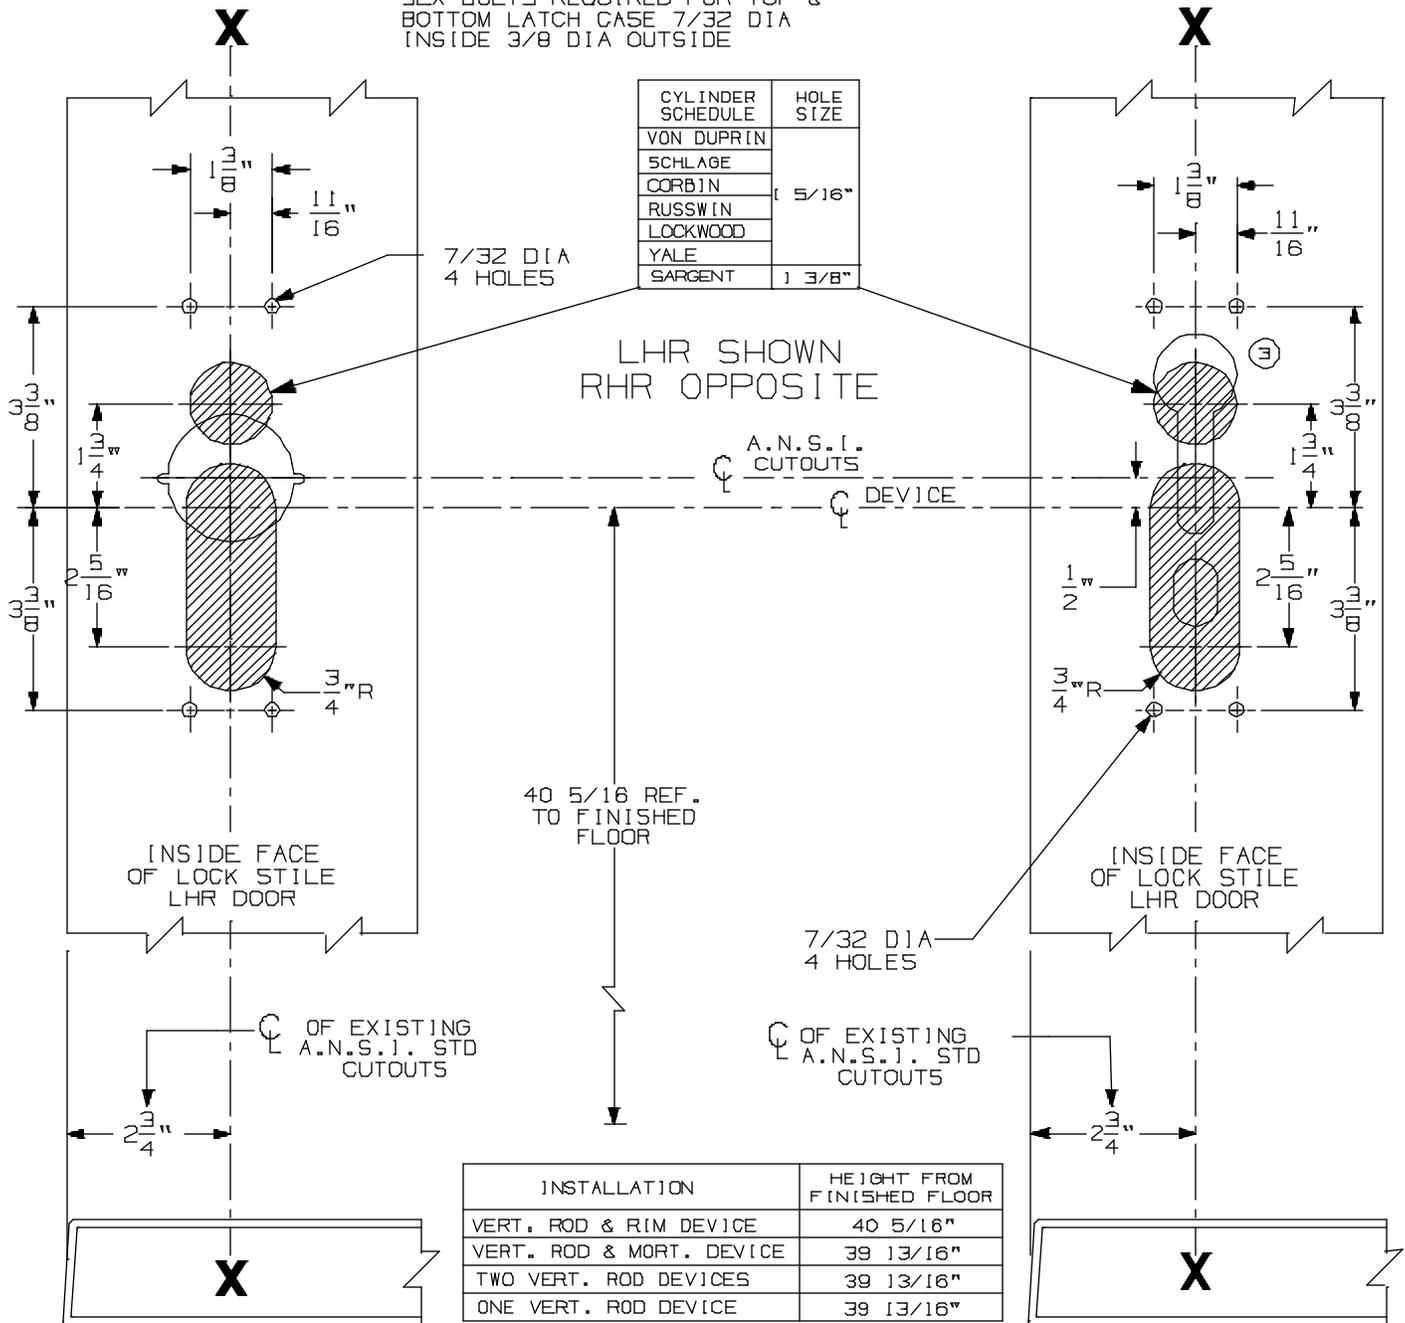

VON DUPRIN CUTOUTS ARE LOCATED FROM A.N.S.I. CUTOUTS
SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE
AND LOCATION OF THESE CUTOUTS.

FOR OUTSIDE TRIM PREPARATION,
SEE ADDITIONAL TRIM TEMPLATE.

8827TP Vertical Rod Device w/ 880 Trim for Stock Hollow Metal Applications

VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

10200_a

DATE:
05-16-13