


FOR ADDITIONAL INFORMATION SEE TEMPLATE NO. 10156 OR NO. 10170

NOTE: TYPE 161 STOCK HOLLOW METAL APPLICATIONS FOR 88 DEVICES WILL WORK ONLY ON THESE APPLICATIONS: SINGLE DOOR & 299, 299F OR 268 STRIKE. (5)

TYPE 161 STOCK HOLLOW METAL DOOR

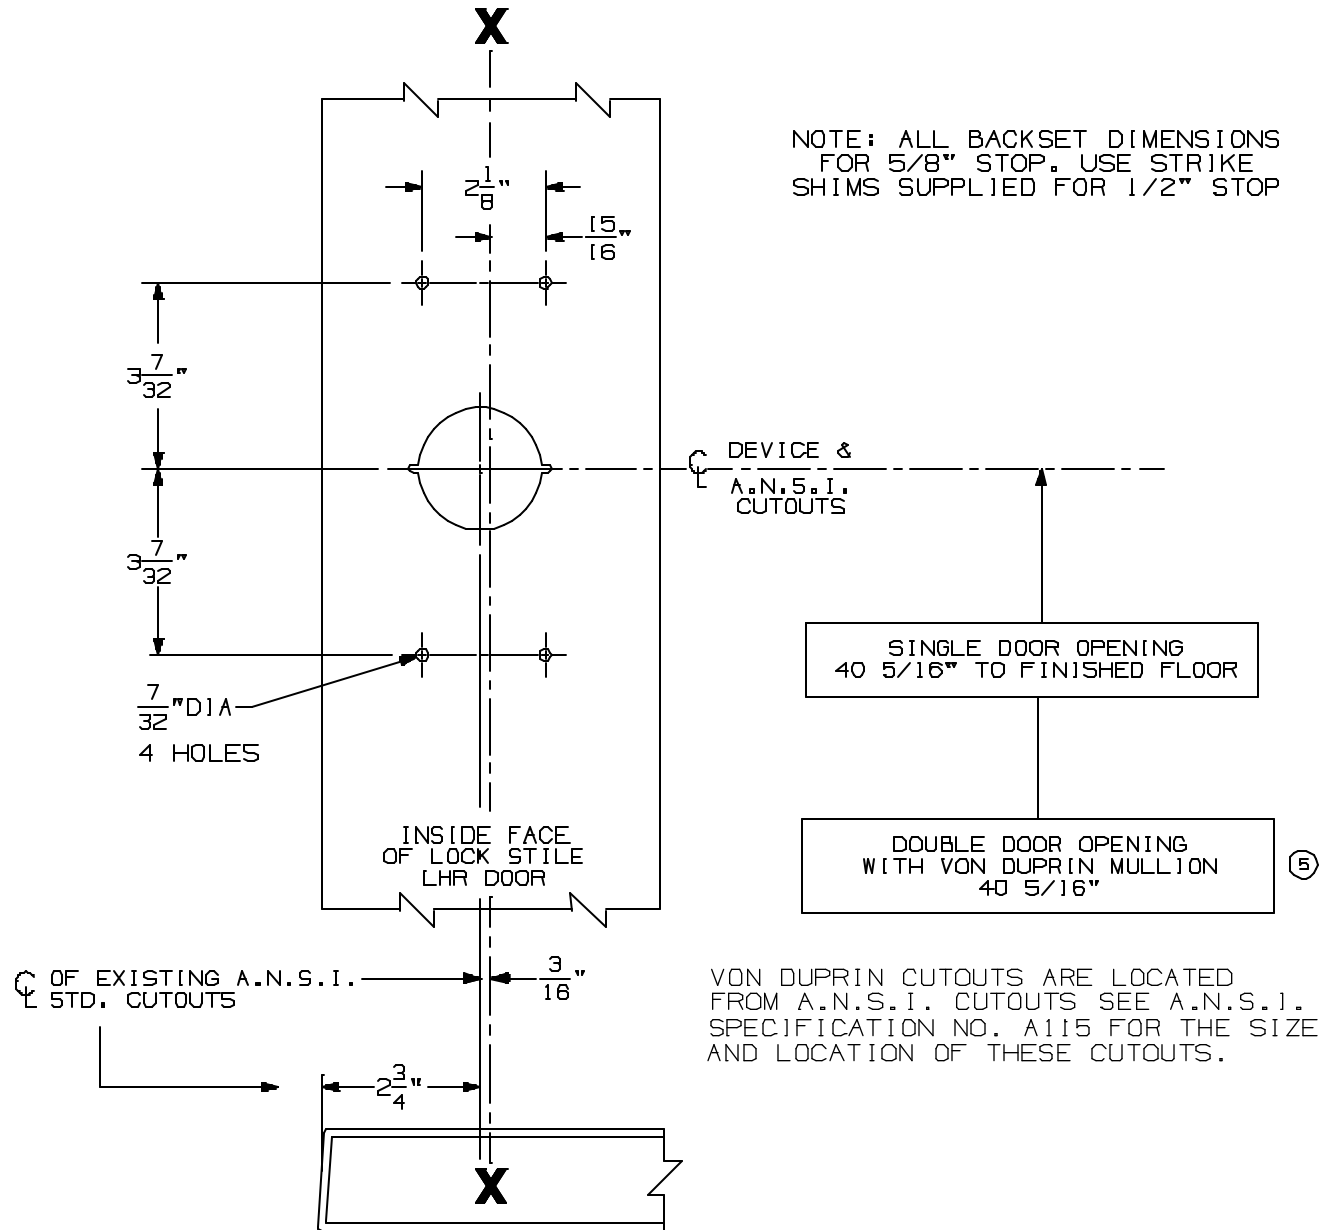

FOR OUTSIDE TRIM PREPARATION, SEE ADDITIONAL TRIM TEMPLATE.

88NL Rim Device w/ 880 Trim for Type "161" Stock Hollow Metal Applications

VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

10195_a

DATE: 05-16-13