




47255386

Model 328FS

Head and Jamb Protection



Installation Instructions

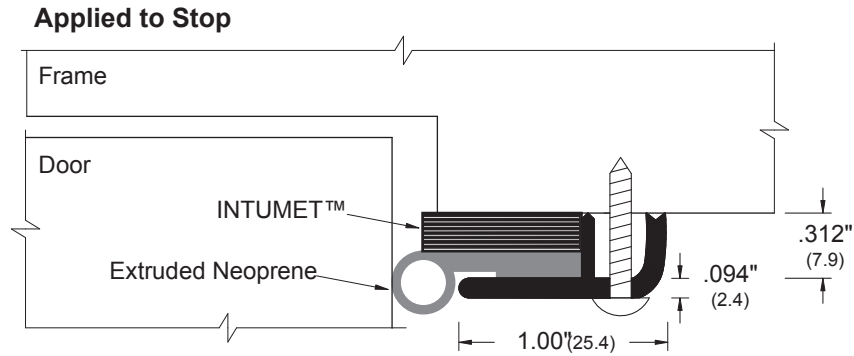

- 1 Measure, cut, and install the head piece making contact with the door.
- 2 Measure, cut, and install the side jambs. The jamb pieces should be continuous to the floor or top of the threshold. Mount pieces with the door in closed position. The seals should be set to hold a paper in place. This should be a contact seal, not crushing.



Customer Service

1-877-671-7011

www.allegion.com/us

© Allegion 2016
Printed in U.S.A.
47255386 Rev. 11/16-b