



2720 Tobey Drive, Indianapolis, IN 46219  
 Tel 1-877-671-7011 ■ Fax 800-851-0000  
 Zero.Customer.Support@allegion.com  
 www.zerointernational.com

Part No:

175

Part description:

Interlocking threshold

Notes:


Provided by:

Customer name:

Job no:

Date:

Image may not be shown to scale

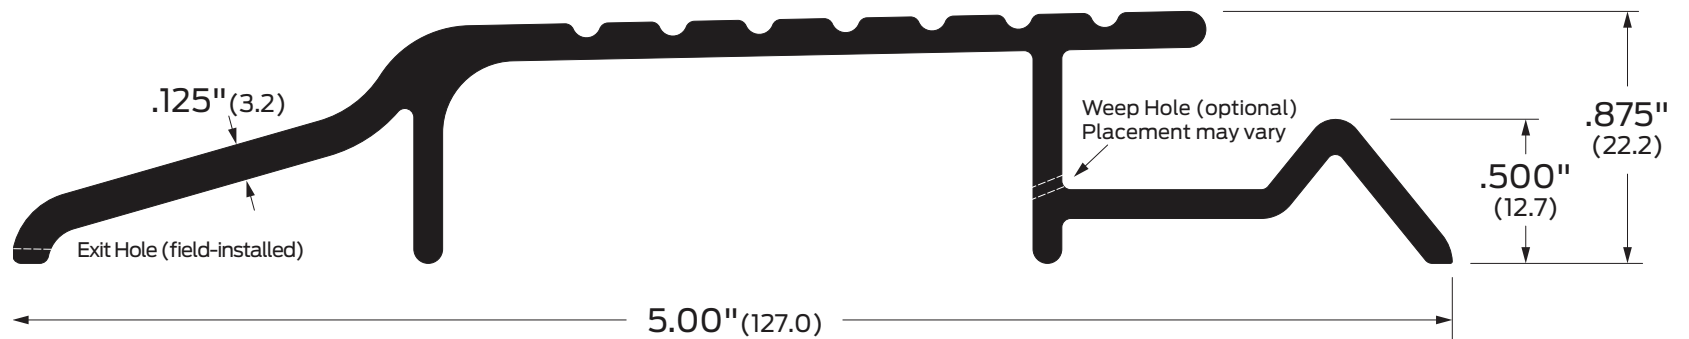

Notes:

In-swing. Drain pan required underneath when used with weep holes.

Certifications:

Fire rated-UL10c

ANSI/BHMA:

175A, 175D, 175G, 175BK  
 175A-E, 175D-E, 175G-E, 175BK-E  
 175B  
 175B-E

J34170  
 J34270  
 J14170  
 J14270

Finishes:

**A** Aluminum mill finish  
**BK** Aluminum black anodized  
**D** Aluminum dark bronze anodized  
**G** Aluminum gold anodized  
**B** Bronze, architectural mill finish  
**B-ORB** Oil-rubbed bronze

Options:

**E** Epoxy abrasive tread  
**EL** Photoluminescent and abrasive epoxy tread  
**V3** Full body strength fill  
**ELV3** Photoluminescent and abrasive epoxy tread, full body strength fill

(not available for ORB finish)

