# e-Smart 2000

## Standalone Deadbolt






### **Features**

- Offline deadbolt, programmable at the lock - easy installation and programming
- For single residential homes or multi-housing facilities
- Offers 12-key illuminated keypad and mechanical key override
- Robust and unique motor design provides stronger, faster and more reliable gear drive
- Patent pending hybrid gearing design provides quieter operation
- Complies with the ANSI/BHMA Grade 1
- UL 10C 3 Hour Rated

### **Electronic Specifications**

- Offline motorized deadbolt lock, programmable at the lock
- Powered with 4 AA alkaline batteries, 1-year battery life in normal conditions

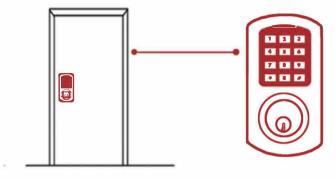

- Standard 12-key illuminated keypad
- 100 user codes and 5 service codes capacity per lock
- Low battery warning

### **Mechanical Specifications**

- Single cylinder motorized deadbolt lock
- Standard 161 door prep
- . For door thickness 1-3/8" to 1-3/4"
- 5 or 6 pin Schlage C keyway н.
- 6 or 7 pin Small or Large format IC(SFIC/LFIC) with or without core High security optional
- 1" x 2-1/4" faceplate, plated finish
- 2-3/4" x 1-1/8" strike .
- 1" throw deadbolt, anti-saw pins, drive-in deadbolt available
- 2-3/8" and 2-3/4" backset adjustable
- Dummy trim available for inactive leaf of paired door

### Warranty

- 1-year limited for electronic
- 5-year limited for finish
- 10-year limited for mechanical

How To Order				
Series	ES2T: e-Smart 2000 TownSteel ES4T: e-Smart 4000 TownSteel ES5BT: e-Smart 5000 BLE(Bluetooth) TownSteel ES5RT: e-Smart 5000 RF(WIFI) TownSteel ESDT: e-Smart Dummy TownSteel	Example: Series	Cylinder	
Finish	622 / US19 / Flat Black 630 / US32D / Satin Stainless Steel Others finish upon request		<b>1</b>	
Cylinder	D: Dummy SC(KIK): 5 or 6 pin SFIC/LFIC: Small/Large form at IC Core with or without core, 6 or 7 pin HS: High Security	F	Finish	

# e-Smart 4000

### **Standalone Deadbolt**





### Features

- Programmable at the lock
- For single residential homes or multi-housing facilities
- Illuminated touch keypad, RFID card, and mechanical key override
- Robust and unique motor design provides stronger, faster and more reliable gear drive
- Patent pending hybrid gearing design provides quieter operation
- Certified ANSI/BHMA A156.36, Grade 1 listed
- 3 hour UL fire rated and NFPA 80 fire code certified

### **Electronic Specifications**


w To Order

- Powered with 4 AA alkaline batteries, 1 year battery life in normal conditions
- 12-key touch keypad
- Code length: 6 to 10 digits
- 99 pin codes and 300 MIFARE RFID cards/stickers capacity

### **Mechanical Specifications**

- Heavy duty motorized deadbolt lock
- Standard 161 door prep
- For door thickness 1-3/4"
- 5 or 6 pin Schlage C keyway
- 6 or 7 pin Small or Large format IC(SFIC/LFIC) with or without core High security optional
- 1-1/8" x 2-3/4" strike
- 1" throw deadbolt, anti-saw pins, drive-in deadbolt available
- 2-3/8" and 2-3/4" backset adjustable
- Dummy trim available for inactive leaf of paired door

### **Programming Features**





- RFID 13.56 MHz
- 300 MIFARE RFID cards/stickers capacity
- Custom logo imprinting available

### Warranty

- 1-year limited for electronic
- 5-year limited for finish
- 10-year limited for mechanical

HOW IO C	vr der	
Series	ES2T: e-Smart 2000 TownSteel ES4T: e-Smart 4000 TownSteel ES5BT: e-Smart 5000 BLE(Bluetooth) TownSteel ES5RT: e-Smart 5000 RF(WIFI) TownSteel ESDT: e-Smart Dummy TownSteel	Example: Series Cylinder
Finish	622 / US19 / Flat Black 630 / US32D / Satin Stainless Steel Others finish upon request	ES5BT - 622 - SC5
Cylinder	D: Dummy SC(KIK): 5 or 6 pin SFIC/LFIC: Small/Large form at IC Core with or without core, 6 or 7 pin HS: High Security	Finish

# e-Smart 5000

## **Standalone Deadbolt**



e-Smart 5000-RF e-Smart 5000-BLE





 Either Bluetooth Low

 Energy (BLE) or WiFi (RF)

 Eluetooth low energy (BLE)

 WiFi (RF)

 WiFi (RF)

### Features

- Programmable at the lock or through an APP
- For single residential homes or multi-housing facilities
- Illuminated touch keypad, RFID card, and mechanical key override
- Robust and unique motor design provides stronger, faster and more reliable gear drive
- Patent pending hybrid gearing design provides quieter operation
- Certified ANSI/BHMA A156.36, Grade 1 listed
- UL 10C 3 Hour Rated

### **Electronic Specifications**

- Works with gateway via WiFi or BLE
- Powered with 4 AA alkaline batteries, 1 year battery life under normal conditions
- 12-key touch keypad
- Code length: 6 to 10 digits
- 99 pin codes and 300 MIFARE RFID cards capacity

### How To Order

# SeriesES2T: e-Smart 2000 TownSteel<br/>ES4T: e-Smart 4000 TownSteel<br/>ES5BT: e-Smart 5000 BLE(Bluetooth) TownSteel<br/>ES5RT: e-Smart 5000 RF(WIFI) TownSteel<br/>ESDT: e-Smart Dummy TownSteelFinish622 / US19 / Flat Black<br/>630 / US32D / Satin Stainless Steel<br/>Others finish upon requestCylinderD: Dummy<br/>SC(KIK): 5 or 6 pin<br/>SFIC/LFIC: Small/Large form at IC Core with or without core, 6 or 7 pin<br/>HS: High Security

### **Mechanical Specifications**

- Heavy duty motorized deadbolt lock
- Standard 161 door prep
- For door thickness 1-3/4"
- 5 or 6 pin Schlage C keyway
- 6 or 7 pin Small or Large format IC(SFIC/LFIC) with or without core High security optional
- 1" x 2-1/4" faceplate, plated finish
- 1-1/8" x 2-3/4" strike
- 1" throw deadbolt, anti-saw pins, drive-in deadbolt available
- 2-3/8" and 2-3/4" backset adjustable Dummy trim available for inactive leaf of paired door

### Warranty

- 1-year limited for electronic
- 5-year limited for finish
- 10-year limited for mechanical


### Example:





# e-Smart Series



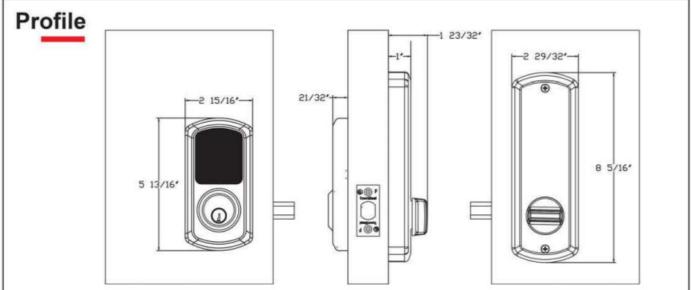


How To Order				
Series	e-Smart e-Smart Dummy (ESDT)	Series Cylinder		
Finish	SN: US15, Satin Nickel FB: US19, Flat Black SC: US26D, Satin Chrome Or special color upon request	ESGT-SN-SC Finish		
Cylinder	SC(KIK) / SFIC / CLFIC / SLFIC / HS			



# e-Smart Series



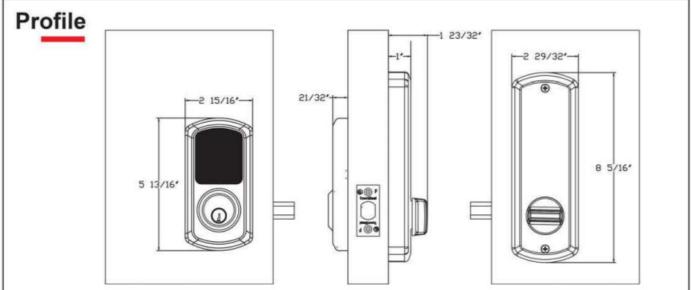

How To Order				
Series	e-Smart e-Smart Dummy (ESDT)	Series Cylinder		
Finish	SN: US15, Satin Nickel FB: US19, Flat Black SC: US26D, Satin Chrome Or special color upon request	ESGT-SN-SC Finish		
Cylinder	SC(KIK) / SFIC / CLFIC / SLFIC / HS			