

STAND-ALONE SMART LOCK


Multi-Credential Options



Works With



EXTERIOR VIEW

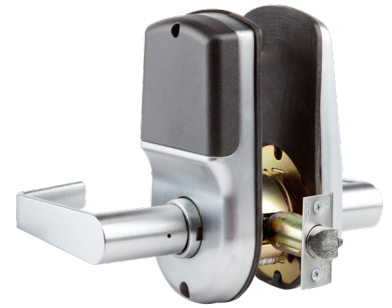

INTERIOR VIEW

Product Features

| | |
|------------------|---|
| Access Types | Smartphone, PIN access codes, smart remote, smartwatch, traditional key override |
| Access Levels | 24/7 access, ability to create schedules. Two-factor authentication capable |
| Max Users | 100 users maximum |
| Audit Trail | 25 events stored locally in APP, 1 years' worth in the cloud. Defined # of events. Event filtering and report exporting is standard |
| Notifications | Supports 24 standard Push notifications |
| Programmed | Managed locally (APP) or PIN codes via PIN pad |
| Power Source | 4 AA alkaline batteries |
| Back set | 2-3/4" standard, 5" as an option |
| Door Thickness | 1-3/4" - 2-1/4" thick, preset for 1-3/4" |
| Handing | Non-handed, field reversible |
| Operation | Always locked or can be set to Passage mode. |
| Chassis | Built on PDQ SD Grade 2 standard-duty chassis |
| Cylinders | Conventional, SFIC, Schlage LFIC, High Security and UL 437 |
| Keying | 22 keyways plus Restricted, High Security and UL 437 |
| Keypad | Capacitive touch, back lit |
| Certifications | UL 20 min other ratings pending. |
| Environment | Suitable for interior/exterior applications -31 to 150F weatherized |
| Retrofits | Easy retrofits, utilizes standard 161 door prep |
| Remote Operation | Requires the addition of an ethernet bridge |
| Upgradeable | STP can be upgraded to networked access control with the addition of a Hybrid Cloud Network Device |

Typical Applications

- Primary Residences
- Airbnb / Vacation Homes / Vrbo
- Rental Properties
- Realtors
- Offices / Co-Working Spaces
- Small Business
- Retail
- Medical/ Dental Clinics
- Daycare/ Volunteer Centers
- Fitness Centers/ Gyms
- Warehouses / Distribution Facilities
- Manufacturing Companies
- K-12/ Higher Ed/ Private Schools
- Houses of Worship
- Airports and Transit Centers


Lever Styles



Cylinders



Architectural Finishes

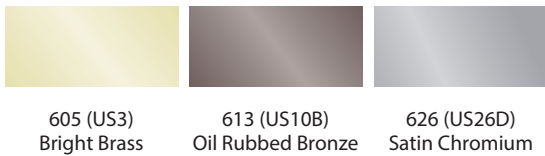

Stand-Alone Smart Locking Solutions



Headquarters: 2230 Embassy Drive, Lancaster, PA 17603
 Phone: 866.874.3662 | Email: smartsupport@pdqlocks.com
www.smartstandalone.com