



SD Series

Grade 2 Cylindrical Locks



SHOWN WITH
PHILADELPHIA LEVER



SHOWN WITH
MEMPHIS LEVER

SPECIFICATIONS



FOR DOORS: APPLICATION:

- 1-3/8" to 1-3/4" thick
- Preset for 1-3/4" door
- Through door thru-bolting
- Fits standard 160 and 161 Door prep
- Thru-Bolts are removable

BACKSET: CHASSIS:

- 2-3/4" standard
- 2-3/8" optional
- Heavy-gauge cold rolled steel mechanism
- Dichromated for corrosion resistance

FRONT:

- 2-1/4" x 1-1/8" or 2-1/4" x 1"
- Beveled 1/8" on 2"
- Stainless Steel or Wrought Brass

STRIKE:

- ASA standard
- T-Strike or Full Lip Strike optional
- Stainless Steel or Wrought Brass

ROSE:

- 3-3/8" DIA Wrought

LATCHBOLT:

- 1/2" Throw

HAND:

- Non-handed (Except Memphis)

TRIM:

- Solid Zinc diecast PHL, BSN, MIA, MEM and ORL Levers
- Wrought Brass Roses
- Concealed Screws

KEYS:

- Two (2) per Lock

KEYWAYS:

- SCC standard (Schlage C Compatible)
- Also available in keyways of other manufacturers

INTERCHANGEABLE CORE:

- 6 or 7-pin
- Compatible with Best, Falcon & Arrow.
- Not available with Memphis lever.

CYLINDER:

- 6-pin Brass Insert Cylinder keyed to 5-pins

KEYING:

- Options: MK, CMK or GMK / Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
- Can be keyed into existing master key systems
- 605 (US3), 613 (US10B), 626 (US26D)

FINISHES:



CERTIFICATIONS, LISTINGS

COMPLIANCES:

- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA A156.2-2003 Grade 2
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Meets requirements of the Buy American Act.

WARRANTY:

- Five (5) year Limited Warranty

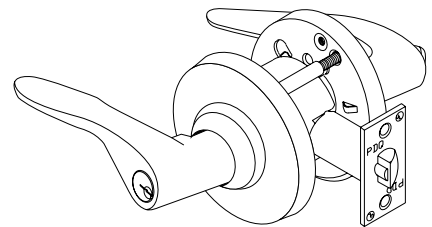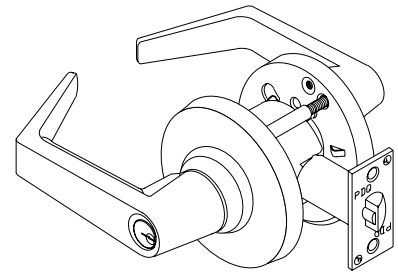

‡ Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.

FINISHES

ARCHITECTURAL



605 (US3)
Bright Brass, No Coating




613 (US10B) Oil Rubbed
Bronze, No Coating




626 (US26D)
Satin Chromium Plated,
No Coating

HANDING

In Swing Door

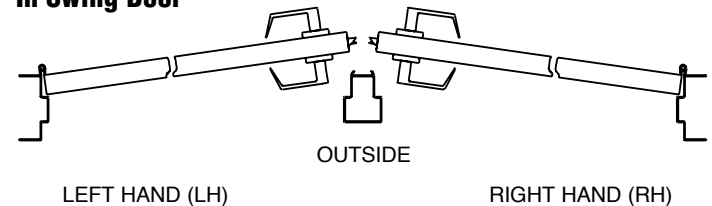

Out Swing Door

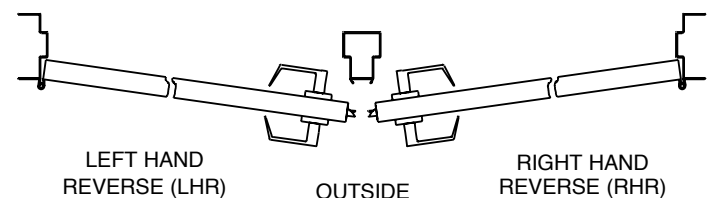

CROSS REFERENCE

ANSI # / FUNCTION	PDQ	ARROW	CAL ROYAL	CORBIN	DORMA	FALCON	HAGER	SARGENT	SCHLAGE	YALE
F75 PASSAGE	SD 126	RL01	30	CL3710	C510	W101	2510	6U15	AL10S	4601LN
F76 PRIVACY	SD 176	RL02	20	CL3720	C540	W301	2540	6U65	AL40S	4602LN
F109 ENTRANCE	SD 116	RL11	N/A	CL3751	C553	W511	2553	65G37	AL53PD	4607LN
F84 CLASSROOM	SD 148	RL17	3	CL3755	C570	W561	2570	6G37	AL70PD	4608LN
F86 STORE ROOM	SD 115	RL12	5	CL3759	C580	W581	2580	6G04	AL80PD	4605LN
SINGLE DUMMY	SD 211	RL08	40	CL3750	C501	W12	2517	6U93	AL170	4655LN

LEVER COMPARISON

PDQ	ARROW	CAL ROYAL	CORBIN	DORMA	FALCON	HAGER	SARGENT	SCHLAGE	YALE
MIA — MIAMI	N/A	AT	AZD	N/A	N/A	N/A	B	ATH	MO
PHL — PHILADELPHIA	BRR	GN	NZD	LR	D	WTS	L	RHO	AU
BSN — BOSTON	SR	SPA	PZD	LC	Q	ARC	P	SPA	PB
MEM — MEMPHIS	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
ORL — ORLANDO	N/A	N/A	N/A	N/A	N/A	N/A	N/A	LAT	N/A



MIAMI (MIA)



PHILADELPHIA (PHL)



BOSTON (BSN)



MEMPHIS (MEM)
- SPECIFY HANDING.
- NOT AVAILABLE WITH SFIC



ORLANDO (ORL)

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

HOW TO ORDER

QUANTITY	SERIES	FUNCTION	TRIM	FINISH	HANDING	BACKSET	STRIKE	CYLINDER OR HOUSING	KEYWAY	KEYING
10	SD	116	PHL	626	RH*	234	ASA	D	SCC	KD
*Memphis keyed and dummy functions only.						ASA — ANSI/ASA (Default) FL — Full Lip T — "T" Strike		D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin SFL — SFIC Housing less core		

CYLINDERS/CORES/KEYWAYS

PDQ cylinders and cores are designed to interface with the keyways of most major lock manufacturers. Insert cylinders are designed to accept 6 pins and are combined for 5 pins. These cylinders are shipped with two keys. Interchangeable core cylinders are available combined or uncombined for 6 and 7 pins and must be specified when ordering. Available in two finishes — 606 (US4) and 626 (US26D); specify when ordering separately.





Key in Knob/Lever Cylinder (Default)





Small Format Interchangeable Core.

CYLINDERS & CORES

DESCRIPTION		PINS	FINISHES	
			606	626
	Conventional Key In Knob/Lever Cylinder	6 Pin	V4802-8	V4802-7
	Small Format, Best® Compatible - Uncombined	6 Pin 7 Pin	I5206 -8 I5207-8	I5206 -7 I5207-7
	Small Format, Best® Compatible - Combined	6 Pin 7 Pin	I5206-1-8 I5207-1-8	I5206-1 -7 I5207-1 -7

NOTE: Part Numbers Listed For Default Keyway. For Other Keyways, See Price List.

HIGH SECURITY CYLINDERS & CORES

DESCRIPTION		PINS	FINISHES	
			606	626
	Key in Knob/Lever Cylinder	6 Pin	HSC125-8	HSC125-7
	Key in Knob/Lever Cylinder - UL437	6 Pin	HSC425-8	HSC425-7
	Small Format, Best® Compatible - Combined	6 Pin	HSC806-8	HSC806-7
	Small Format, Best® Compatible - Combined	7 Pin	HSC807-8	HSC807-7

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R
PDQ Restricted	TA		
Arrow AR1	ARA		
Corbin 59A1	CQ59A1		
Corbin 60	C06		
Corbin L4	CL4		
Russwin D1	RUD	PDQ Exclusive	PDQ1
Russwin 981	RUD981		PDQ2
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC		
Schlage C-K	SCC-K		
Sargent LA	SAL		
Sargent RA-RC	RA-RC		
Yale E1R	YA8		
Yale GA	GA		
Falcon E-R	FAL		
Kwikset	KW		

KEYING


DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be SD series from PDQ Industries, Inc., Leola, Pennsylvania. Lock will feature a five-year manufacturer’s limited warranty. and be U.L./U.L.C. listed and certified to ANSI/BHMA A156.2–2003, Series 4000, Grade 2. Listed by UL / ULC for ratings of “A” label (3 hours) and less, UL10C / UBC 7-2 (1997) positive pressure, for single doors up to 4’0” x 8’0”. Lock shall

fit type 160 or 161 door preparation. Lockset to be fully adjustable for 1-3/8” to 1-3/4” door thickness. Lock will accommodate keyways of major manufacturers. Lockset fasteners to be concealed with through-the-door through-bolt attachment outside the 2-1/8” door preparation. Through-bolts to be removable, if desired, to use only the 2-1/8” door preparation.

LEVER DESIGNS

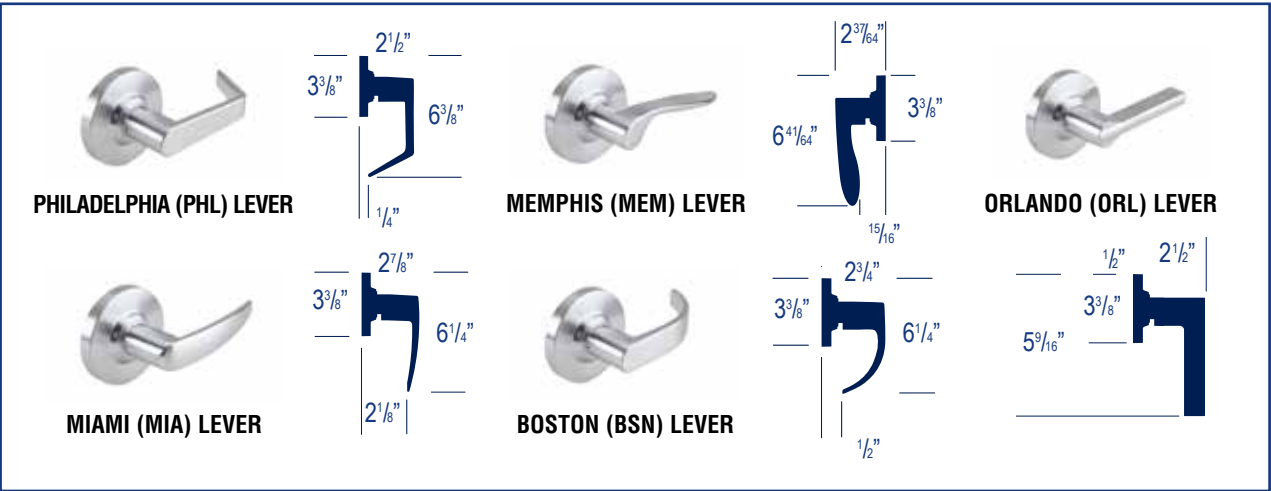

PDQ FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
NON KEYED				
Communicating	SD125		<ul style="list-style-type: none">• Latchbolt operated by inside lever• Blank plate outside• Minimum clearance of 1-1/2" between doors• Deadlocking (guarded) latchbolt	—
Passage	SD126		<ul style="list-style-type: none">• Latchbolt operated by lever from either side at all times	F75
Privacy Bedroom Bathroom	SD176		<ul style="list-style-type: none">• Latchbolt operated by lever from either side or emergency release in outside lever• Outside lever locked by push button on inside• Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door	F76
Single Dummy	SD211		<ul style="list-style-type: none">• Pull lever one side• No mechanical operation	—
KEYED				
Storeroom	SD115		<ul style="list-style-type: none">• Latchbolt operated from outside by key, inside by lever• Outside lever always fixed• Inside lever always free• Deadlocking (guarded) latchbolt	F86
Entrance	SD116		<ul style="list-style-type: none">• Latchbolt operated by lever from either side or key in outside lever• Outside lever locked by push/turn button on inside• When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever• When outside lever is locked by pushing and turning the button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever• Deadlocking (guarded) latchbolt	F109
Classroom	SD148		<ul style="list-style-type: none">• Latchbolt operated by lever from either side• Outside lever locked or unlocked by key from outside• Inside lever always operates latch• Deadlocking (guarded) latchbolt	F84

WHEN TIME EQUALS MONEY

PDQ'S *PRIORITY* *QUICKSHIP* DELIVERS

1410 37TH ST NW, SUITE D
AUBURN, WA 98001

2507 SOUTH 300 WEST
SALT LAKE CITY, UT 84115

1926-30 LINN ST
KANSAS CITY, MO 64116

2754 CREEK HILL ROAD
LEOLA, PA 17540

Our Four Distribution Centers are ideally located to provide quick delivery throughout the entire United States. Priority Quickship items will ship same day or next day after the order is received. Contact your sales representative or PDQ Customer Service for more information.



Headquarters: 2754 Creek Hill Road • Leola, PA 17540 • 800.441.9692 • 717.656.6892 Fax
Regional Distribution Centers: Kansas City, MO, Salt Lake City, UT, Seattle, WA
www.pdqlocks.com

PDQ'S SD Series Brochures are now printed entirely on Forest Stewardship Council™ certified paper. FSC Certification ensures that the paper used in this catalog contains fiber from well-managed and responsibly harvested forests that meet strict environmental and socioeconomic standards. We're proud to be one of the first hardware manufacturers in the country to make this significant move to help our environment. The FSC logo on our brochure signals not only FSC Certification, but also PDQ's commitment to improving the environment.



Mixed Sources
Product group from well-managed
forests and other controlled sources
www.fsc.org Cert no. SW-COC-002931
© 1996 Forest Stewardship Council