

ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53502

REV. 8 04-12-2019


MORTISE FUNCTIONS	MR117	MR135	MR136
	MR141	MR149	MR154
	MR162	MR181	MR213

SEE NOTE 6

INSIDE OF RIGHT HAND DOOR

DOOR EDGE

OUTSIDE OF RIGHT HAND DOOR

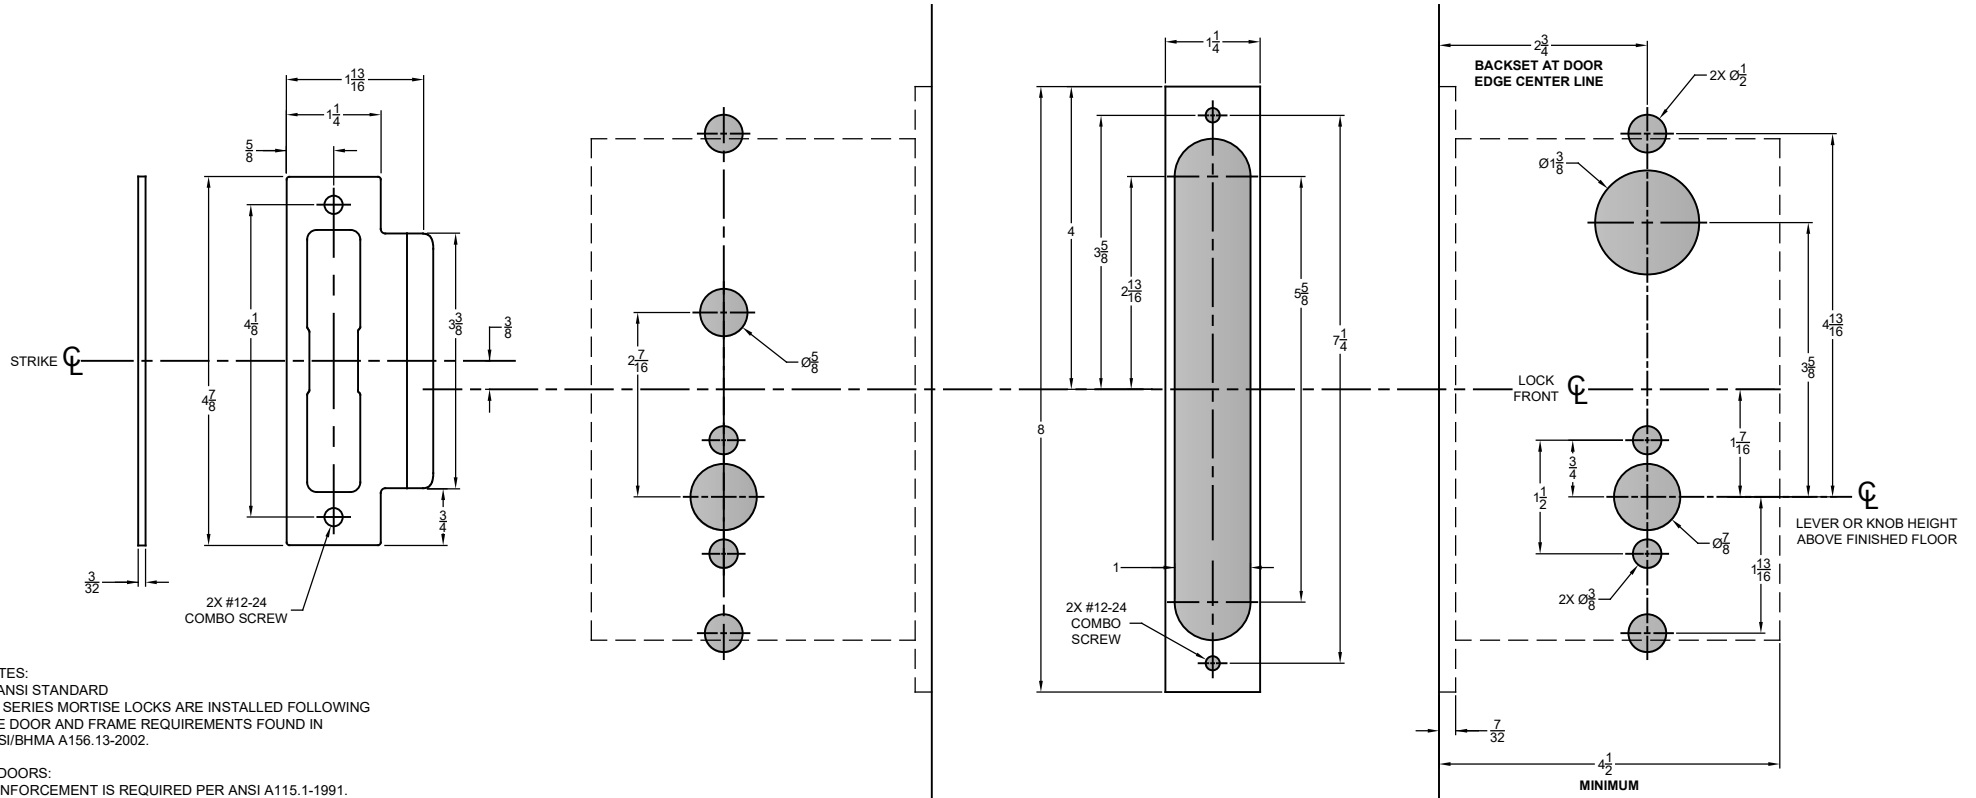

NOTES:

- ANSI STANDARD
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.
- DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.
- DOOR THICKNESS:
STANDARD DOOR THICKNESS IS $1\frac{3}{4}$ ". CONSULT FACTORY FOR OTHER DOOR SIZES.
- LEAD LINING:
ADD $\frac{1}{8}$ " TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.
- SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.
- DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.