


ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53506

REV. 3 04-18-2019

MORTISE FUNCTIONS MR211

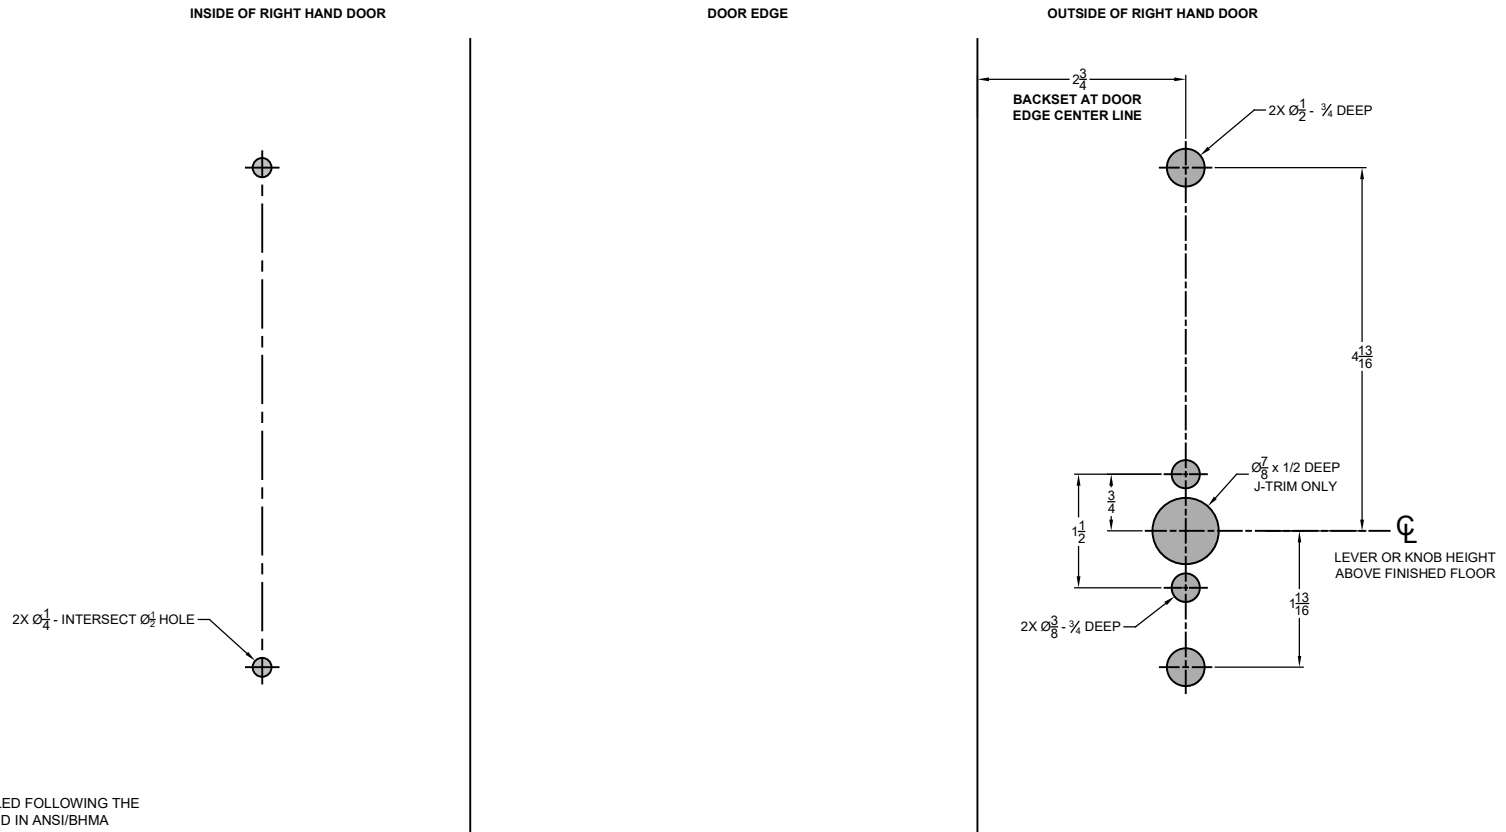

ANSI STANDARD:
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

DOOR THICKNESS:
STANDARD DOOR THICKNESS IS $1\frac{3}{4}$ ". CONSULT FACTORY FOR OTHER DOOR SIZES.

LEAD LINING:
ADD $\frac{1}{8}$ " TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.