


SECTIONAL LEVER AND BALL KNOB TRIM

TEMPLATE: W53513

REV. 5 04-25-2019

MORTISE FUNCTIONS MR114 MR128 MR137
 MR138 MR157 MR158
 MR159

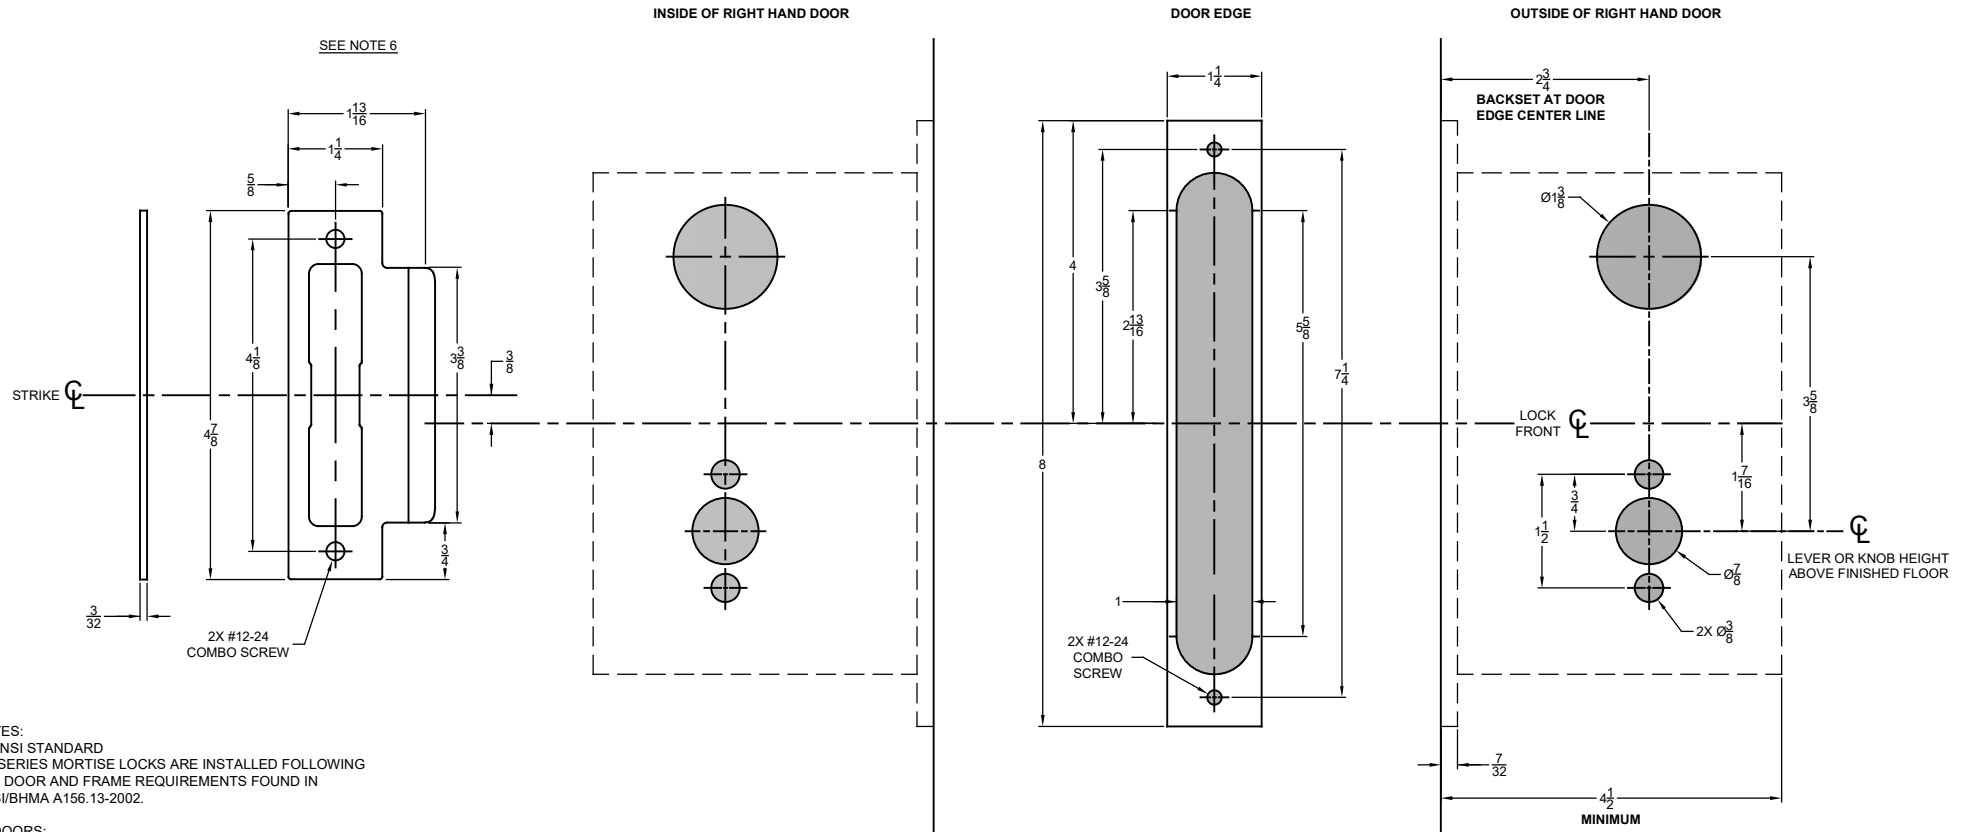

- NOTES:
- ANSI STANDARD
 MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.
 - DOORS:
 REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.
 - DOOR THICKNESS:
 STANDARD DOOR THICKNESS IS 1-3/4". CONSULT FACTORY FOR OTHER DOOR SIZES.
 - LEAD LINING:
 ADD 1/8" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.
 - SILENCERS AND WEATHER STRIPPING:
 PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.
 - DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.