


DEADBOLT OUTSIDE CYLINDER ONLY

TEMPLATE: W53516

REV. 4 04-29-2019

MORTISE FUNCTIONS MR131

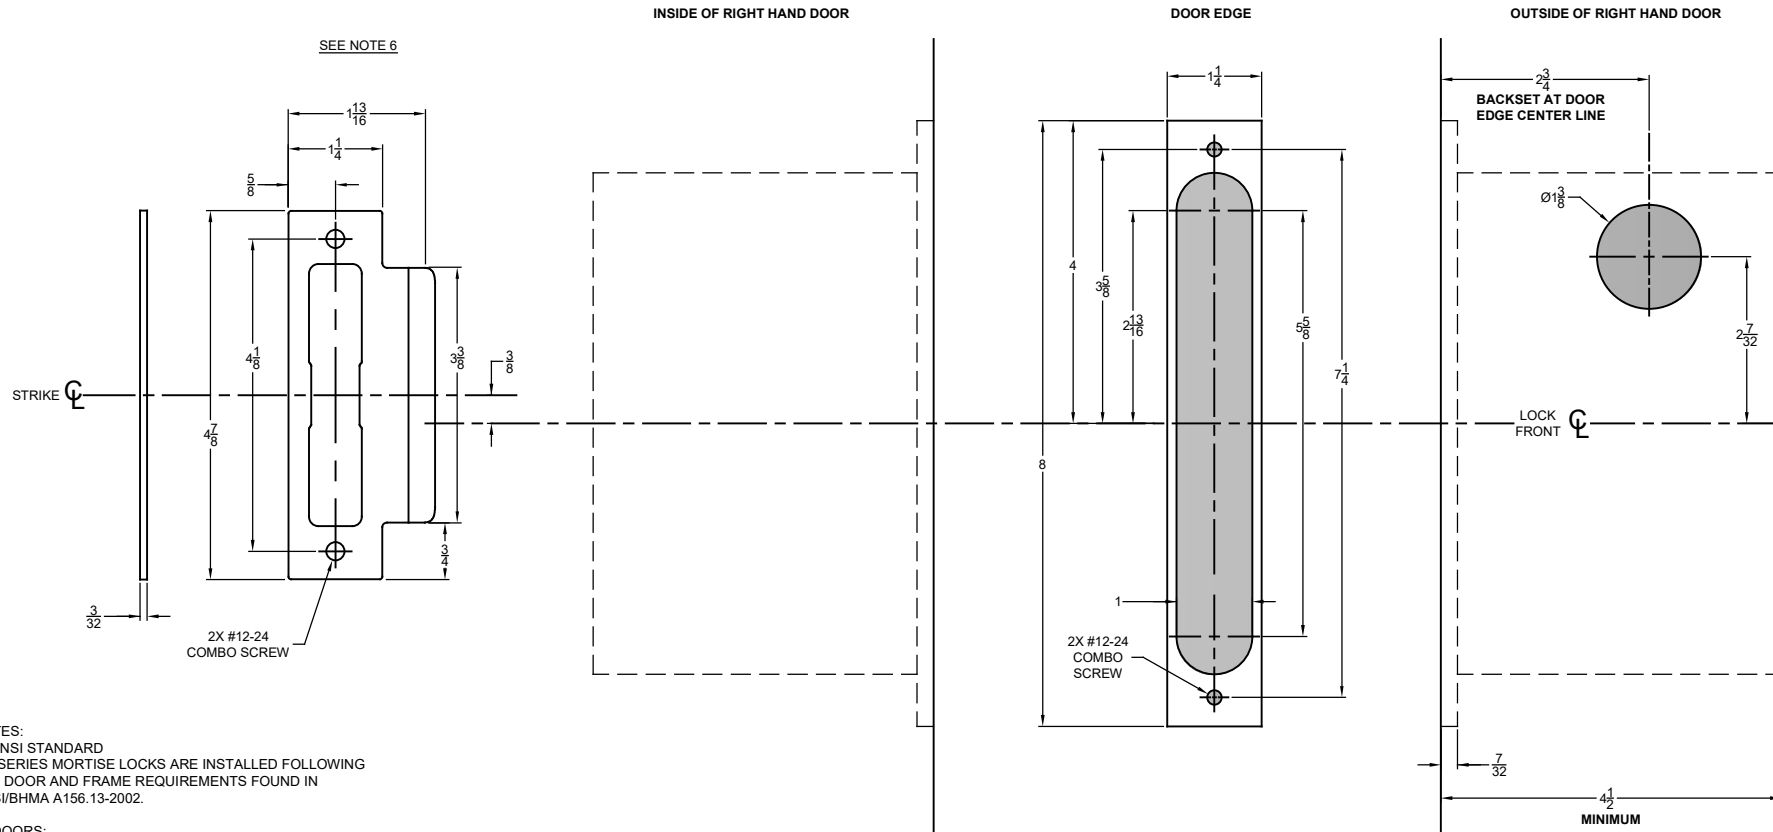

- NOTES:
- ANSI STANDARD
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.
 - DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.
 - DOOR THICKNESS:
STANDARD DOOR THICKNESS IS $1\frac{3}{4}$ ". CONSULT FACTORY FOR OTHER DOOR SIZES.
 - LEAD LINING:
ADD $\frac{1}{8}$ " TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.
 - SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.
 - DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.