


DEADBOLT DOUBLE CYLINDER

TEMPLATE: W53518

REV. 3 04-29-2019

MORTISE FUNCTIONS MR133 MR134

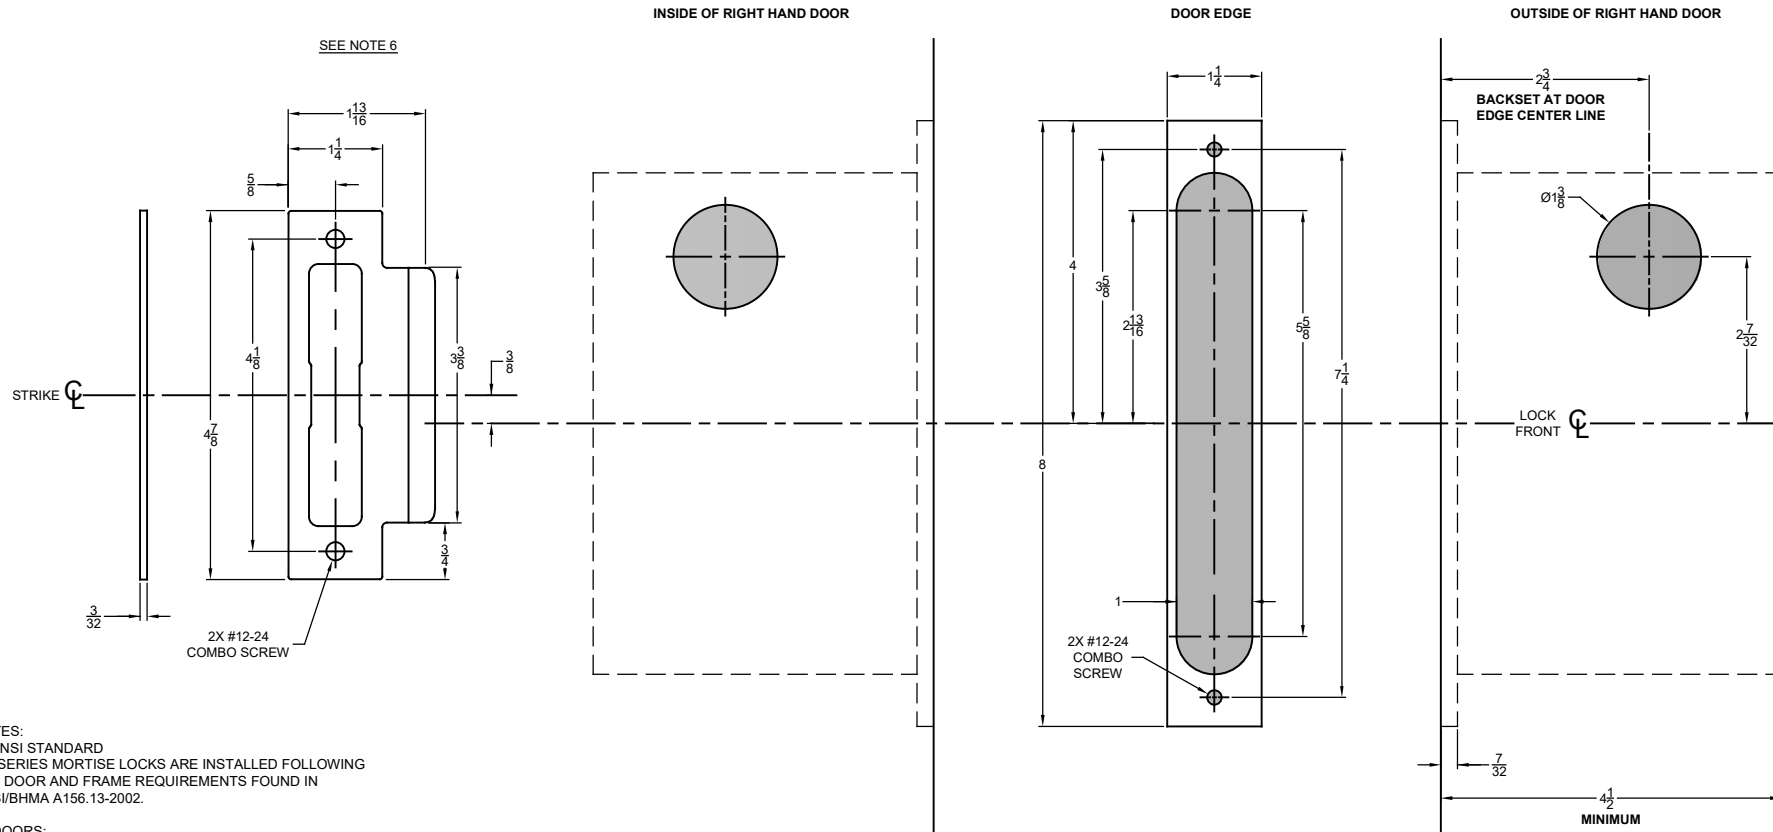

SEE NOTE 6

NOTES:
 1. ANSI STANDARD
 MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING
 THE DOOR AND FRAME REQUIREMENTS FOUND IN
 ANSI/BHMA A156.13-2002.

2. DOORS:
 REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

3. DOOR THICKNESS:
 STANDARD DOOR THICKNESS IS $1\frac{3}{4}$ ". CONSULT FACTORY
 FOR OTHER DOOR SIZES.

4. LEAD LINING:
 ADD $\frac{1}{8}$ " TO MORTISE WIDTH WHEN PREPARING DOOR FOR
 A LEAD LINED MR SERIES MORTISE LOCK BODY.

5. SILENCERS AND WEATHER STRIPPING:
 PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR
 CLOSURE WHEN USING DOOR SILENCERS, WEATHER
 STRIPPING OR SOUND PROOFING.

6. DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR
 THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE
 MANUFACTURERS TEMPLATE FOR DETAILS.