




NO HASSLE  
3 YEAR  
WARRANTY

# CALRIMLBMKIT22-ED

## INSERT INSTRUCTIONS

The CALRIMLBMKIT22-ED is a Field Installable Latchbolt Monitor KIT for the Cal Royal 2200 Series. This switch is SPDT (Single Pole Double Throw).

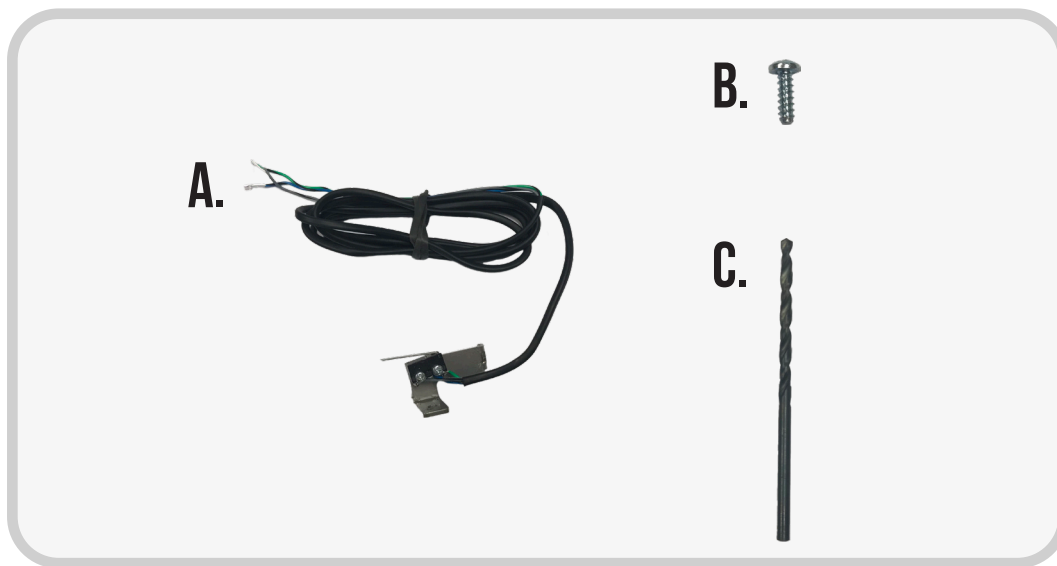

### KIT INCLUDES

- A. 60533 - REX Switch
- B. 40041 - Screw 4-24 x 3/8"
- C. 10029 - Drill Bit #37

### TOOLS REQUIRED

- Cordless Drill
- Phillips Screwdriver

### SPECIFICATIONS

REX SWITCH: RATED AT 0.5A @ 24VAC/DC


**GREEN** - COMMON (C)

**BLUE** - NORM. OPEN (NO)


**GRAY** - NORM. CLOSED (NC)

# INSTALLATION INSTRUCTIONS



1. From the back side of the device Drill a #37 Hole in the location below (drill bit included)

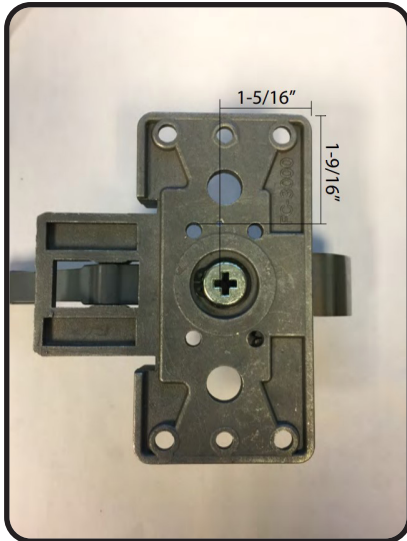

2. Turn the device over and locate the hole that was just drilled

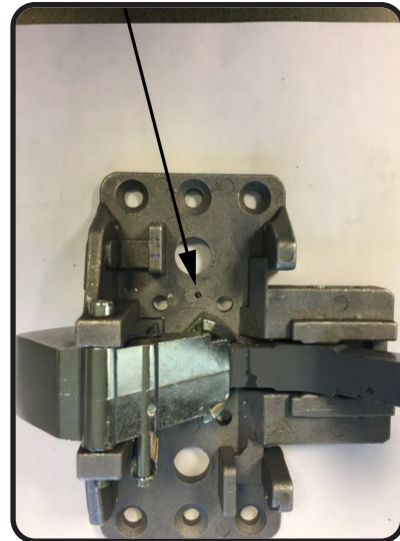

3. Attach the LBM switch with the self tapping screw provided making sure to slip the arm of the switch under the latch bolt

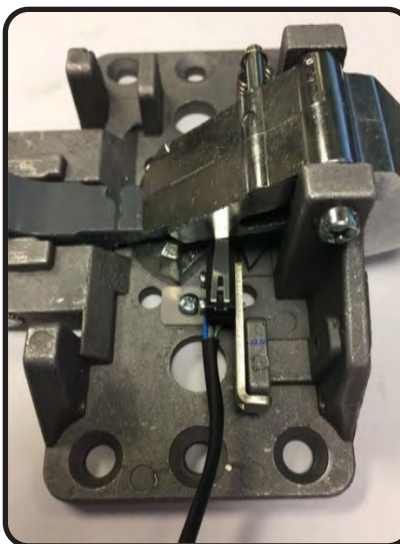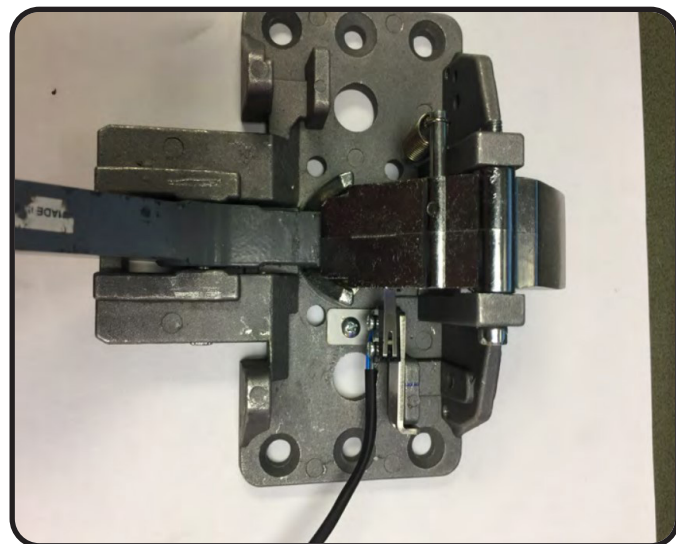

## Switch Information

REX SWITCH: 5A 124VAC/DC  
**GREEN** - COMMON (C)  
**BLUE** - NORM. OPEN (NO)  
**GRAY** - NORM. CLOSED (NC)