



# AL36

S ■ E ■ R ■ I ■ E ■ S

**EXIT DEVICE ALARM KIT**

Powerful alarm notification of unauthorized egress to protect persons and property.




EMERGENCY EXIT ONLY - ALARM WILL SOUND  
PUSH TO OPEN

Automatic resetting to maintain protection at all times

Up to 18 months standby power or 500 alarm cycles from a standard 9 volt battery.


Battery monitoring with a "low charge" signal for easy maintenance.

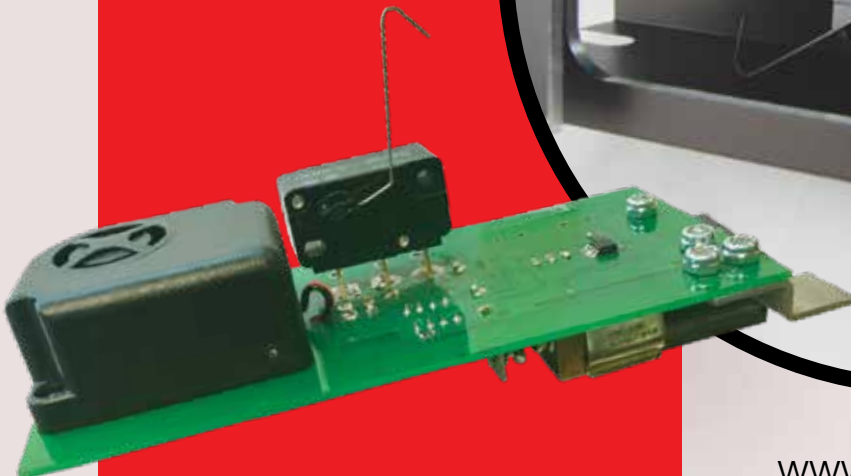

[www.FCBP.com](http://www.FCBP.com)

Phone (800) 793-4544 • Fax (800) 867-5016

# EXIT DEVICE ALARM KIT

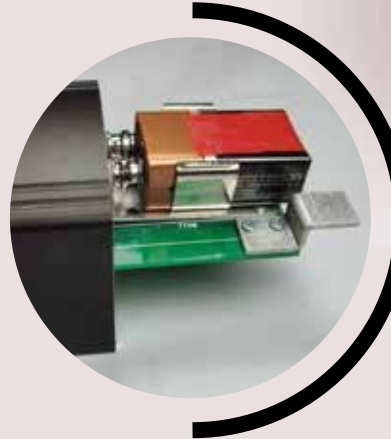

## EASY RETROFIT

Retrofit Kit fits any standard First Choice stock size exit device. Simply remove hinge side end cap and slide the alarm board into the push bar.

## STANDARD ALARM FUNCTION



The standard AL36 Alarm activates by pushing in on the push bar. The alarm will sound for approximately 60 seconds and then turn off and if the push bar has been released, it will automatically reset. It will not reset until the push bar has been released preventing a constant alarm when the device is dogged open.



## SPECIAL ALARM WITH KEYED ON/OFF

An On/Off switch is incorporated with the Interior Key Cylinder Dogging feature to provide keyed On/Off function for the alarm. Depressing the push bar will activate the alarm, but dogging the bar will turn off the alarm. The alarm will not reset until the push bar has been un-dogged with the key.

## MODEL NUMBER

MODEL NO.	ACTIVATION	ALARM CYCLE	ALARM SHUTOFF	ALARM REARM
AL36	When push bar is depressed	60 Seconds	Cycle time is completed	When push bar is released
CDAL36	When push bar is depressed	60 Seconds	When cylinder dogging is used or cycle time is completed	When push bar is released