Electrified Latch Retraction MLRRK1-AREX (EXARLP-UL-M-KIT) "PTS" PUSH TO SET TECHNOLOGY EASY INSTALLATION FAST, QUIET, SMOOTH ONLY LATCH RETRACTION OPTION IN THE INDUSTRY PATENT PENDING CUSTOM BALL SCREW FOR GREATER TORQUE ULL LISTED RETROFITS ADAMS RITE EX SERIES EXIT DEVICES

The new **MLRK1-AREX** is the first & ONLY, groundbreaking field installable motorized latch retraction kit for Adams Rite EX series exit devices. It utilizes a custom ball screw assembly and CAT designed custom stepper motor to maximize the pulling force in a package small enough to fit inside all Adams Rite EX devices with no clearance issues.. The only hole you'll need to drill is theraceway! It utilizes our PTS "Push to Set" technology making post-installation adjustments incredibly easy. It also offers an optional REX integrated into the kit & the kit installs underneath the push pad giving you plenty of room for cutdown devices.

SPECIFICATIONS

Voltage:

- Voltage range 22 to 28 VDC
- System protection unit shutdown when voltage exceeds 28VDC
- Standard Average Current Peak: 1.3A, Average Current Hold: 170mA
- High Torque Average Current Peak: 2A, Average Current Hold: 250mA
- PTS adjustment approx. 1/4"

Wire Run:

• 300' with 18ga wire

Product Details:

• Weight: 2 Lbs

Device Cutdown Details:

- 36" Down to Pushpad
- 48" Down to Pushpad

FEATURES

- Next Generation MM4 Smart Module: On board diagnostics with audible feedback for adjustment and power issues
- "PTS": 5 second electronic adjustment for easy post installation adjustment
- Electric dogging rated for continuous duty - Auto re-engage if push pad is pulled from dogged position
- Low Current Draw Field switchable to "High Torque" mode
- Up to 300' wire run with 2-18ga wire -Long wire runs provides installer with convenience of placing the Command locking hardware power supply in a centralized location; i.e. the same closet as the access control panel
- 8' cable with Quick Connect for MM4 module to easily connect to power supply lead
- Optional Request-to-exit can be built-in
- 3-year "no hassle" warranty

U.S. Customer Support 1-888-622-2377 Visit our website for more details www.CommandAccess.com

Canada Customer Support 1-855-823-3002

Command Access is not a licensee, or affiliated, associated or connected with Allegion, Assa Abloy, Stanley, Schlage, Falcon, Von Duprin, Dorma, Sargent, Corbin Russwin, Yale, Entek, Adams Rite, Best, Precision, Arrow, Design Hardware, Cal Royal, Jackson, Kawneer, AHT, Marshall Best, Marks, Accurate, Baldwin, FSB, PDO, Lawrence, Trans Atlantic, Hager, LSDA, General Lock, or Omnia or any of their subsidiaries or affiliates.




How to Order

PART # E	ASY ORDER #	DESCRIPTION
MLRK1-AREX	79652	Kit for Adams Rite EX SERIES. EU 24V
MLRK1-AREX w/ REX	79653	Kit for Adams Rite EX SERIES. EU 24V w/ REX

EXARLP-UL-M KIT Matrix

The EXARLP-UL-M KIT will work in new installations and as a replacement for installations with existing electrifications, matrix lists available options.

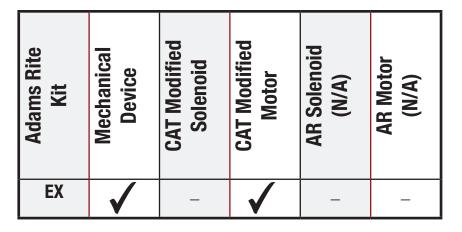



CA Customer Support 855-823-3002 | www.commandaccess.com | US Customer Support 888-622-2377

Command Access is not a licensee, or affiliated, associated or connected with Allegion, Assa Abloy, Stanley, Schlage, Falcon, Von Duprin, Dorma, Sargent, Corbin Russwin, Yale, Emtek, Adams Rite, Best, Precision, Arrow, Design Hardware, Cal Royal, Jackson, Kawneer, AHT, Marshall Best, Marks, Accurate, Baldwin, FSB, PDQ, Lawrence, Trans Atlantic, Hager, LSDA, General Lock, or Omnia or any of their subsidiaries or affiliates.