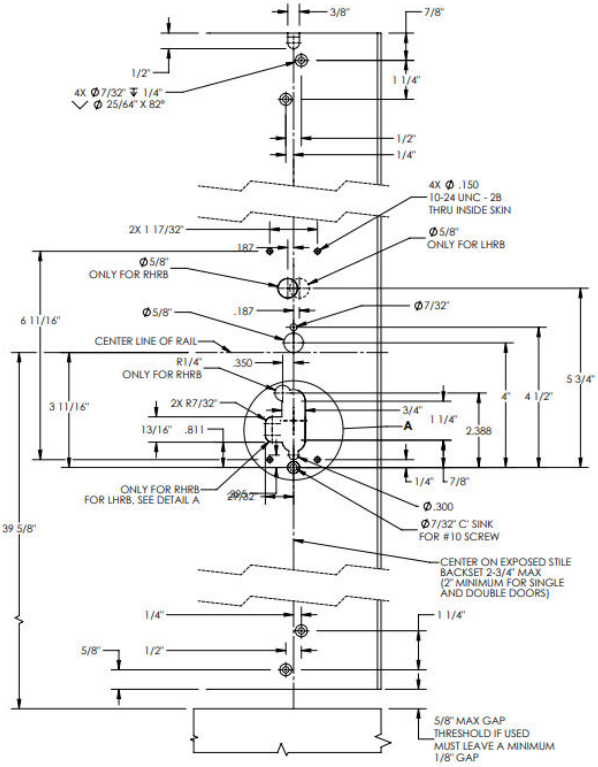

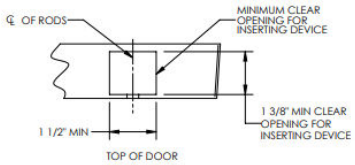

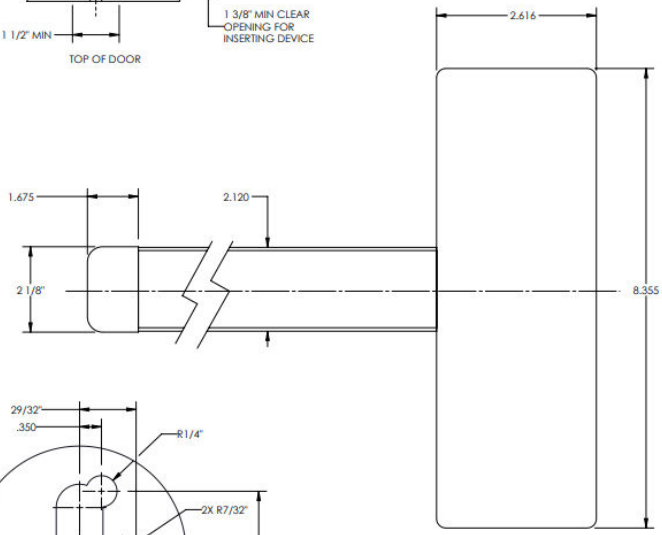



FEATURE FOR LHRB

DETAIL A
SCALE 1 : 1

NOTES:
1. DOOR PREPARATION SHOWN FOR INSIDE DOOR ONLY.
2. IF OUTSIDE PULL AND/OR OUTSIDE CONTROL IS USED, SEE APPROPRIATE DOOR TEMPLATE FOR OUTSIDE DOOR PREP.
3. *MIN BACKSET FOR SINGLE DOOR IS BASED ON 1/2" FRAME STOP. LARGER FRAME STOPS REQUIRE LARGER BACKSET.
4. SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.
5. WE RECOMENDED THAT ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD.
6. TOLERANCE ALL FRACTIONAL DIMENSIONS ±1/64".
7. BOTTOM AND TOP STRIKES MUST BE USED, SEE STRIKE TEMPLATE NO. MEDT6.
8. SEE TEMPLATE NO. MEDT7 FOR AUX CONTROL IF REQ'D.
9. FOR DEVICES WITH NO BOTTOM ROD, HOLES FOR BOTTOM CASE ARE NOT REQUIRED.

TO BE USED FOR:
AD-PE8600
PED5800 AD

ASSA ABLOY
Opening Solutions
Experience a safer and more open world

DOOR MANUFACTURING TEMPLATE:
WIDE CONCEALED VERTICAL ROD FOR ALUMINUM DOORS (INSIDE FACE ONLY)
EXIT DEVICE

RELEASE DATE
05/02/22

TEMPLATE NO.
MEDT2