


Thumbpiece Trim

Metal, Wood or Composite Doors

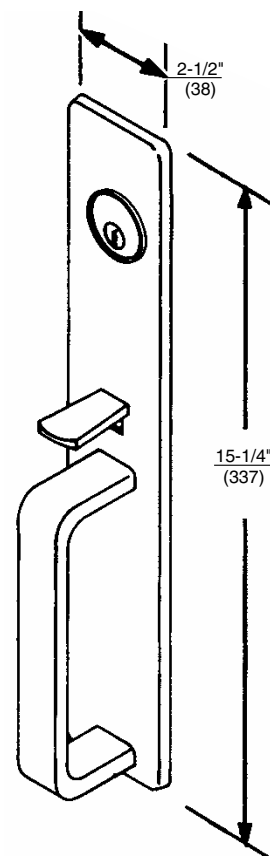

(F05) Classroom Function
(F06) Storeroom Function

Installation Instructions

1

Components

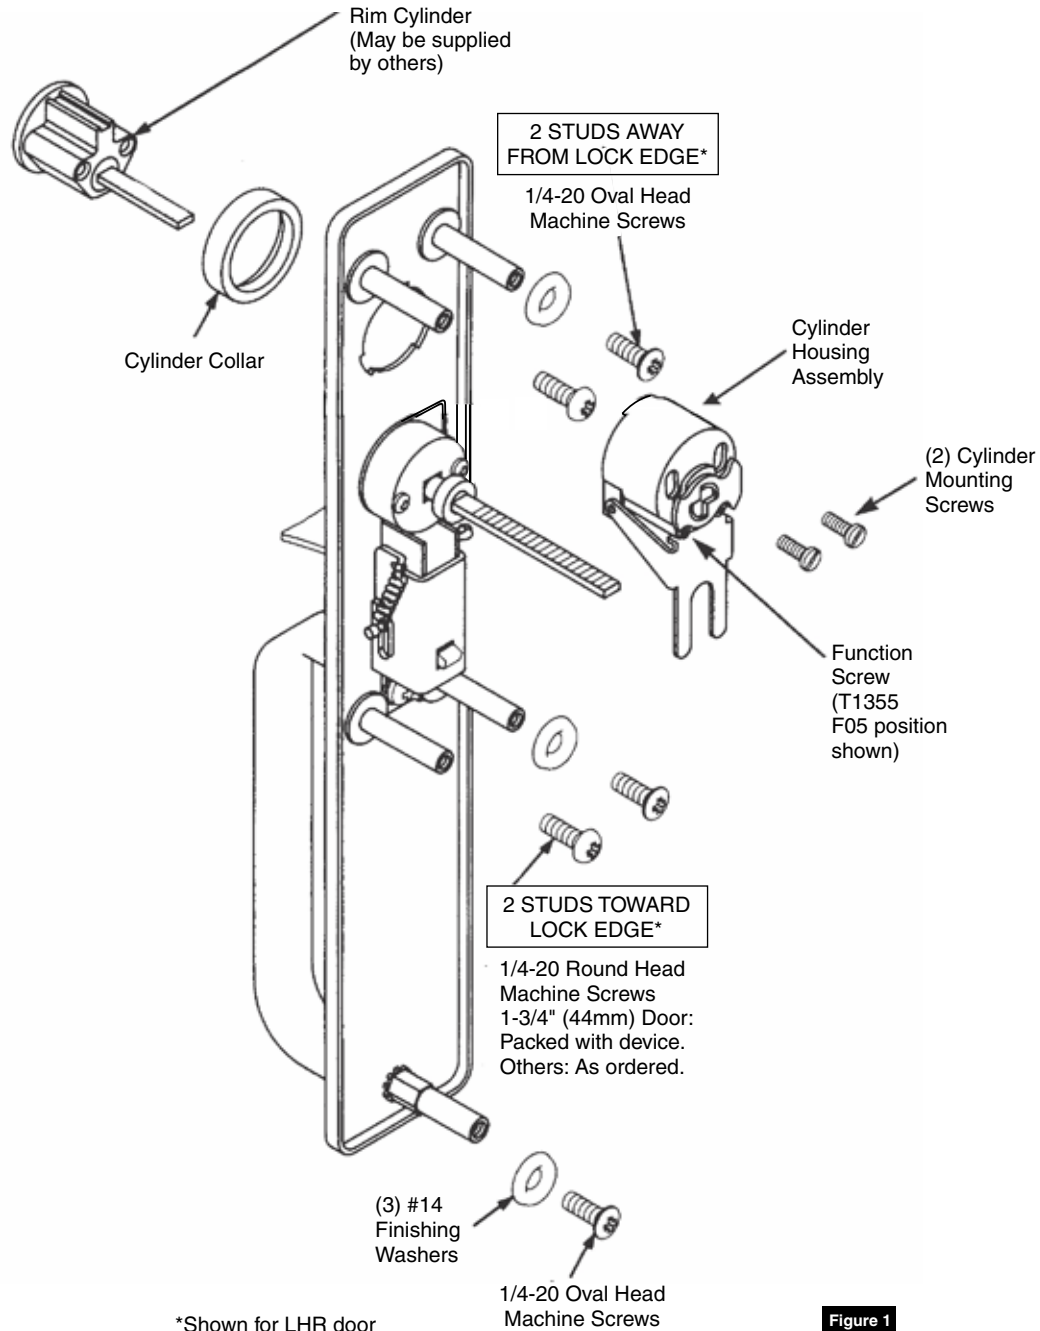


Figure 1

Installation Instructions

2

Trim Assembly

1. Check cylinder components.
NOTE: Non-standard cylinders may require special collars.
2. Assemble cylinder.
Insert cylinder housing prongs into matching notches of escutcheon.
Pass cylinder tailpiece through cylinder collar and slot in cylinder housing cam.
Bolt cylinder seated in cylinder collar recess. **Do not overtighten screws.**
3. Check cylinder action.
Cylinder must freely rotate tailpiece into lock (cam pushing locking lever down) and unlock positions. When locking lever is engaged, it depresses trim spindle. Thumbpiece handle is, thus, disengaged from spindle.
4. Cut cylinder tailpiece. Correct length is 1/16" to 3/16" (2 to 5mm) beyond cylinder housing cam.
5. Determine trim function.
T1355 (as packed):
Classroom Function (F05)
Key locks/unlocks thumbpiece.
Key removable in locked and unlocked positions.

Field convertible to
Storeroom Function (F06):
Key locks/unlocks thumbpiece.
Key removable **ONLY** in locked position.
6. To change trim function:
Rotate cam tip to down position (locked mode).
Move function screw as shown.
(Figure 2)

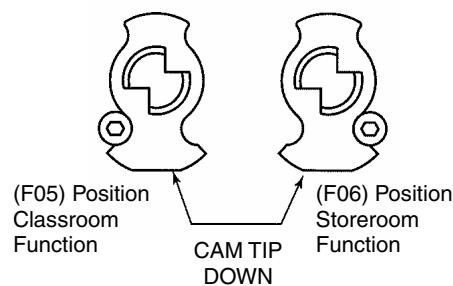


Figure 2

Installation Instructions

3

Installation

1. Assemble trim. (Figure 1)
2. After marking door inside face for device location (Device Instructions), transfer "Vertical Reference Centerline" from inside to outside door face. (Figure 3)
3. Transfer "Horizontal Reference Centerline" from inside to outside door face.
4. Align trim template and tape to outside door face. (pages 6 and 7)
5. Spot holes and prepare door for trim.
6. Mount trim to door. Fasten, finger tight only, with two (2) screws and washers seating on door as shown, plus one (1) engaged to pull bottom stud. (Figure 4)

NOTE:

- Device is bolted to trim using holes "A" (closest to door lock edge).
- Tailpiece "T" gets into horizontal or vertical cam slot.
- Screws and washers bolt trim to door using holes "B".

7. Cut trim spindle as shown. (Figure 5)

NOTE:

- Measure from device mounting surface (door face or shim surface).
 - Trim must be unlocked (tailpiece turning when thumbpiece is depressed).
8. Seat device so that trim tailpiece penetrates cam slot, as shown. (Figure 4) Continue as shown in device instructions.





Figure 3

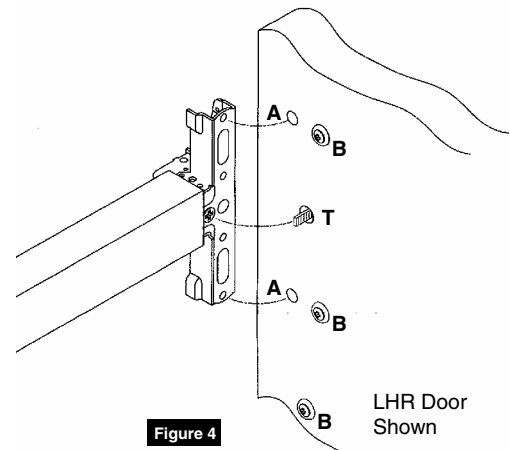


Figure 4

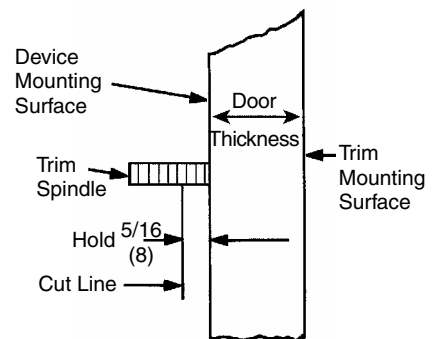


Figure 5

Installation Instructions


4

Template Top

*Wood fire labeled doors require factory prep. See Corbin Russwin Template Book.

Dimensions in inches (mm).

CAUTION: Office copiers and desktop printers may change the size of a drawing and make the template inaccurate to use as a door marker. If this is not the original template packed with the trim, use only the dimensions written on the template to locate the holes on the door. Do not use the template as a door marker.

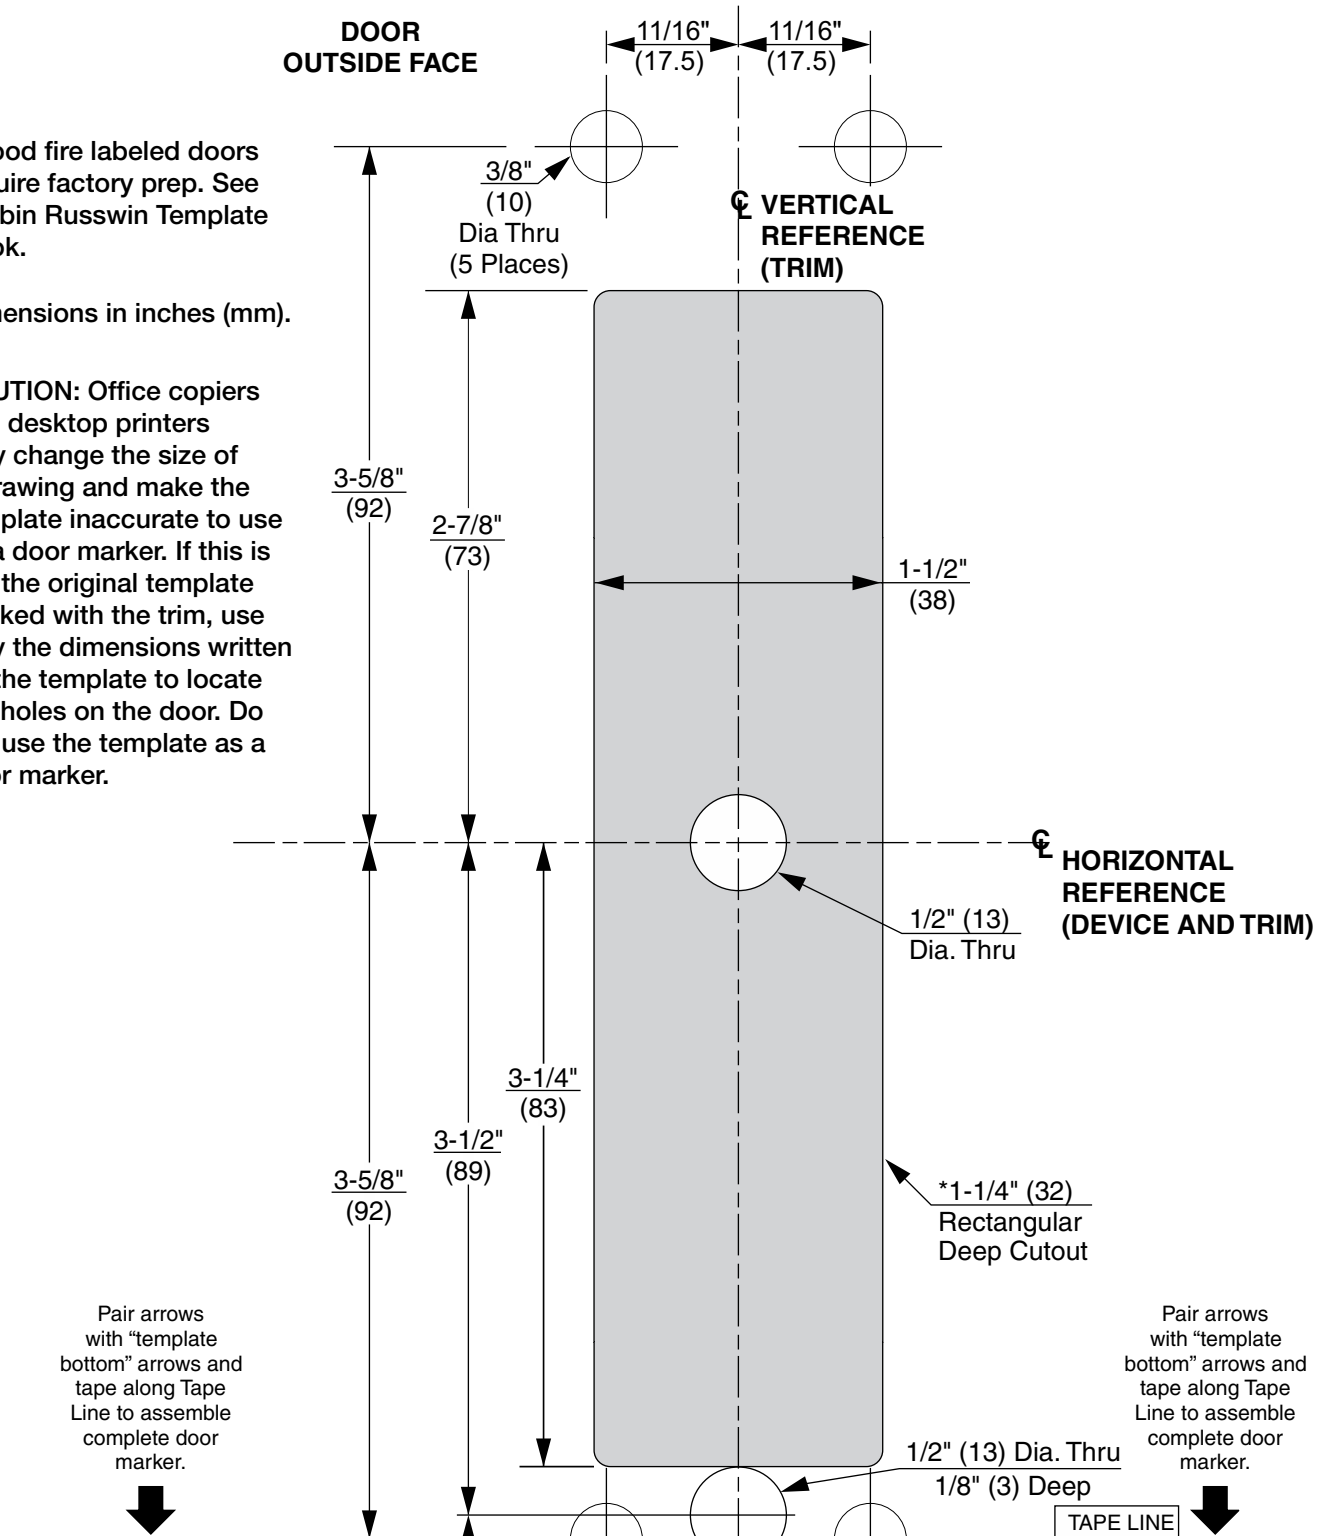


**This page intentionally left
blank for template use.**

Installation Instructions

5

Template Bottom

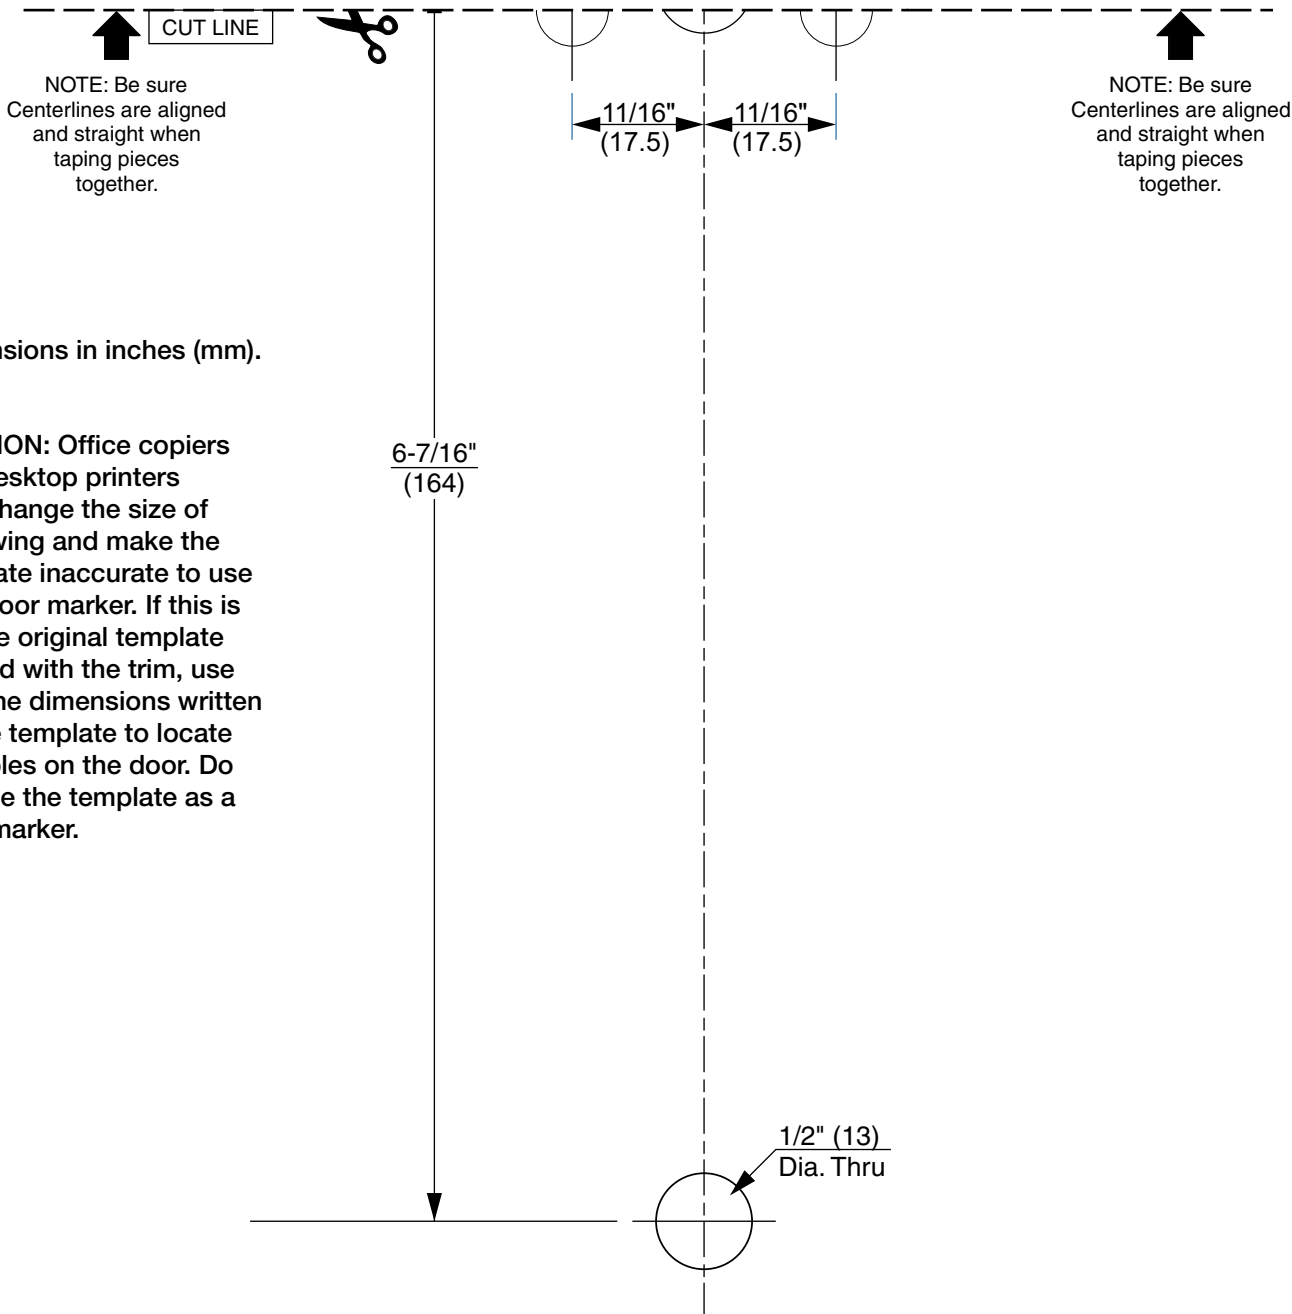

Corbin Russwin
225 Episcopal Road
Berlin, CT 06037
Phone: 800-543-3658
Fax: 800-447-6714
corbinrusswin.com

ASSA ABLOY is the global
leader in door opening solutions,
dedicated to satisfying
end-user needs for security,
safety and convenience

Copyright © 2018 Corbin Russwin, Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written
permission of Corbin Russwin, Inc. is prohibited.

Patent pending and/or patent: www.assaabloydss.com/patents

**For installation assistance contact Corbin Russwin
1-800-543-3658 • techsupport.corbinrusswin@assaabloy.com**

(617416015) FM180A 05/18