



NO HASSLE
3 YEAR
WARRANTY


EDLP1REXKIT-ED

INSERT INSTRUCTIONS

The Command Access EDLP1REXKIT-ED is a field-installable Request to Exit switch for the:

- Tell 9500 series exit devices
- Phoenix Titan 66 series exit devices
- Philadelphia Hardware 9000 series exit devices
- TownSteel ED97 series exit devices

A.

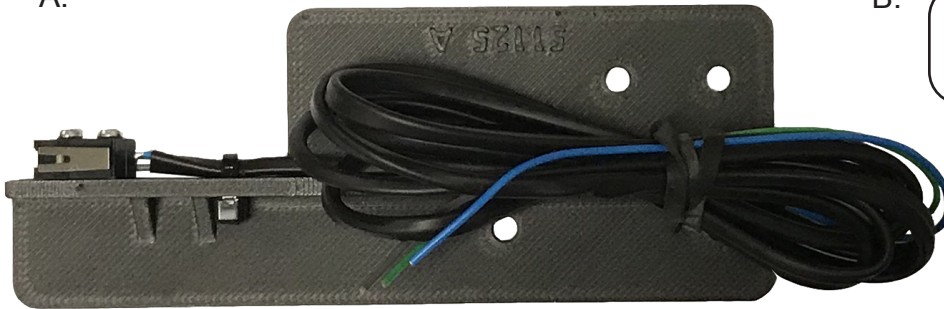

B.

REX Switch Wiring	
GREEN:	Common
BLUE:	Normally Open
GREY:	Normally Closed

KIT INCLUDES

- A. 60439 - EDLP1REXKIT-ED
- B. 20015 - REX LABEL

TOOLS REQUIRED


#2 PHILLIPS SCREWDRIVER

SPECIFICATIONS:


- Single Pole - Double Throw (SPDT)
- Rating: .5A @24VAC
- Configuration: Green - Common (C)
Blue - Normally Open (NO)
Gray - Normally Closed (NC)

INSTALLATION INSTRUCTIONS


- 1 Remove the **Filler Plate** from the device.

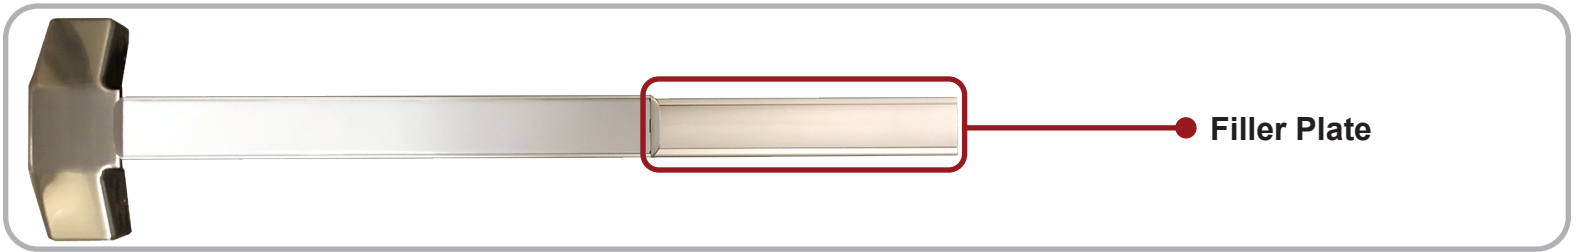

- 2 Locate the **Three Screws** inside, remove them and the **Metal Plate** they are holding down.

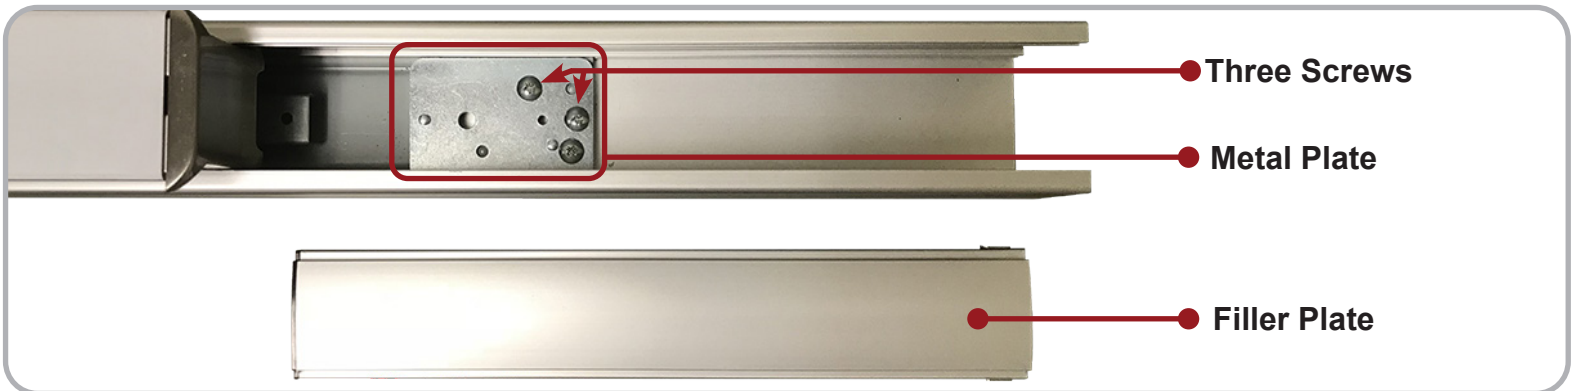

- 3 Bar shown with the **Three Screws** and **Metal Plate** removed. Keep the **Three Screws** to install REX.

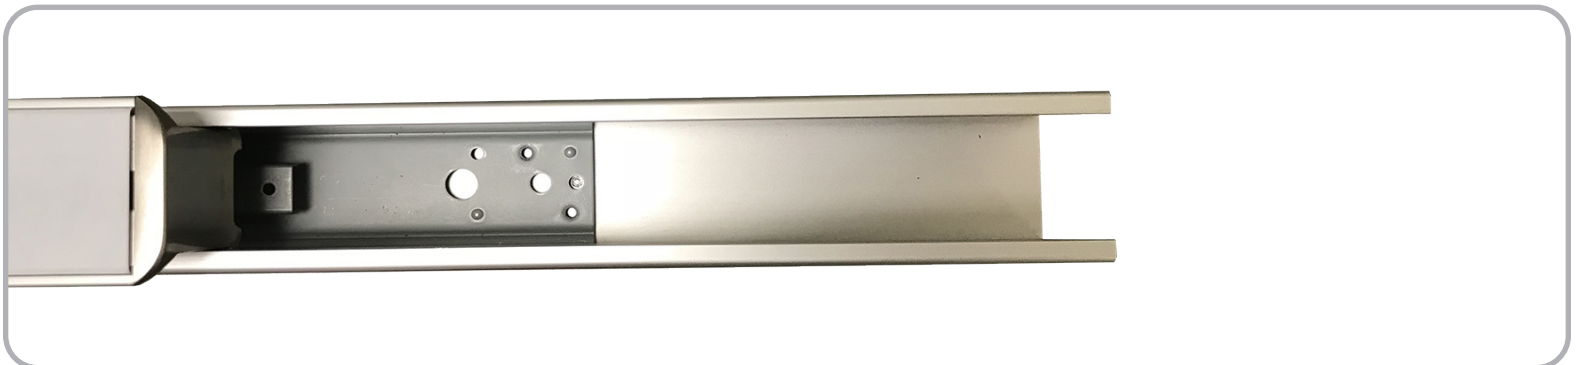

- 4 To install the **EDLP1REXKIT-ED**, slide its bracket in place and install the **Three Screws** in the factory location. Test before re-installing the **Filler Plate**.

