

KRM300

S ■ E ■ R ■ I ■ E ■ S

KEYED REMOVABLE MULLION

Engineered as the ultimate security partner for both series 3700 Rim and 3600 Concealed Vertical Rod devices, these keyed removable mullions provide a sturdy and secure latching point.

With one easy turn of a key the mullion can be removed to allow the full width of a door opening to be available. Reinstallation of the mullion is just as easy: just snap the mullion back into the secure mount on the top of the door frame.


No key is required to reinstall.

Easily cut for a perfect field fit, these mullions come with heavy duty stainless steel strikes and are available in sizes up to 9 feet.



Color matched security clips provide an added level of security by overcoming the natural twisting of the door stile under pressure.

Keyed for quick and easy removal to provide the full width opening on a pair of doors

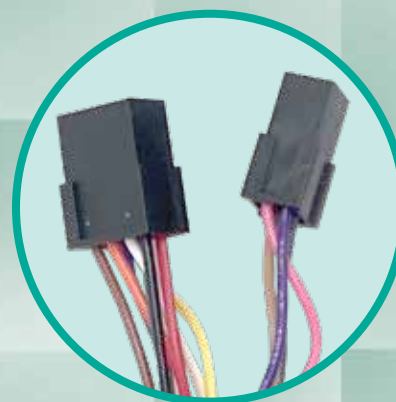

Use With Our Quick Connect Cable Assemblies

Provides a Pre-wired, Plug-in connector that simplifies linking Power from Power Supply to electrified product.

Contact factory for more information on price and availability.

KRM300

S ■ E ■ R ■ I ■ E ■ S



Applications

- Used with rim latching exit devices to provide location
- Used with vertical rod devices to seal the gap between pairs of doors
- The KRM300 series mullions can be field trimmed (for assistance call 800-793-4544)
- Check with door manufacturer for specific locating and frame preparation details

Door Sizes

- Door Heights from 86" up to 110" standard
- Custom Sizes Available

Product Materials

- Anodized Aluminum Extrusion
- Steel internal stiffening rod
- Cast aluminum brackets
- Heavy duty stainless steel strikes

Sample Specifications

- Security Mullion shall be First Choice Building Products series KRM300 model utilizing steel-reinforced aluminum with a 1" dimension at door contact point.
- The Mullion shall use an internal steel stiffening rod.
- The Mullion shall use color matched stabilizer clips to provide an added level of security overcoming the natural twisting of the door stile under pressure.
- The Mullion shall use heavy duty stainless strikes.
- The KRM300 shall utilize a standard mortise key cylinder to provide quick removal of the Mullion in a secure and controlled manner.

Mullion Model #	Finish	KRM Kit Number
RM370-CL	CL - Clear	KRM-001-CL
RM370-BR	BR - Bronze	KRM-001-BR