

100B | 200B

N Series: Weather Resistant Deadbolt Door & Drawer Cabinet Locks

SPECIFICATIONS

Weather resistant: Includes special weather resistant components

Keying: Can be keyed together with other N Series locks

Rekeyable: Easily rekeyable via set screw cylinder release mechanism

Standard function: Key removable in locked or unlocked position. Standard function locks are non-handed.

Key-retaining: Key removable in locked position only. Specify handing (KL/KR for doors or KI/KV for drawers) when ordering.

Long bolt: Extends bolt 3/4" on both ends. Specify -LB option when ordering.

US Patent Nos: 4,899,563; 4,920,774

Body: Zinc die cast

Cylinder: Solid brass, pin tumbler

100B cylinder length: 15/16" or 1-3/8"

200B cylinder length: 15/16", 1-3/8" or 1-5/8"

Barrel diameter: 7/8"

Finish: 26D, US4, 10B or US19 (US19 not available on 100B 1-3/8" or 200B 1-5/8")

Packaged: Packed 10 per box

KEYING INFORMATION

Keyway: N Series (equivalent to National D4291 4-pin or D4292 5-pin system)

Keys: Includes 2 keys per lock

Stock keying: KD/KA - 4 pin standard

Stock KA#: 101, 103, 107, 915

Masterkeyed: 5 pin standard

Grand masterkeyed: Available

Keyblank 4-pin: KBN-4-NP (equivalent to NA14, 1069L)

Keyblank 5-pin: KBN-5-NP (equivalent to NA12, 1069LA)

INCLUDED ACCESSORIES

100B: 2 keys, 56-1 bar strike, and lock mounting screws

200B: 2 keys, 12-3 angle strike, and lock mounting screws

OPTIONAL ACCESSORIES

Spacers: WP20 (3/16" thick), WP21 (3/32" thick), WP22 (1/4" thick), WP23 (1/2" thick)

Strikes: 07S, 12-1, 12-2, 12-3, 12-5, 12-4, 56-1

Trim collars: TR1256

Through-bolt hardware: ETS2 through-bolt plate, ETS2-PL trim pull and ETST2 template

Extended (long) bolt: 15-1-35 (for use with 100B or 200B)




56-1

100B

Function: Cabinet door lock
ANSI/BHMA No. E07121
Barrel length: 15/16" or 1-3/8"
Extended bolt: Extends overall bolt length by 1-1/2". Specify -LB option at time of order.



With long-bolt option



12-3


200B

Function: Drawer lock
ANSI/BHMA No. E07041
Barrel length: 15/16", 1-3/8" or 1-5/8"
Extended bolt: Specify -LB option at time of order.



With long-bolt option

AVAILABLE FINISHES

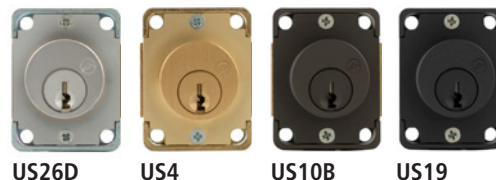

US26D

US4

US10B

US19



WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



**OLYMPUS
LOCK** INC.

