

Pemko Pocket Frame Kit

Space Saving Solution

With the Pemko Pocket Frame Kit, doors slide into walls when opened. Space previously required for swing clearance can now be better utilized for decor or to give a more open feel. The Pemko Pocket Frame Kit is user friendly and precision-made to last for years. Door actuation requires less than 5 lbs of horizontal force, meeting ADA requirements. Kits are available for 2x4 construction with 3½" stud, Wood 2x6 construction with 5½" stud, and Steel 2x6 construction with 6" stud.

Features	Benefits
Allows doors to be completely concealed within walls	Saves valuable space
Requires less than 5 lbs of horizontal force to open	Meets ADA requirements
Space saving sturdy design	Trouble-free operation for years of use
Knock down construction	Easy to assemble
Extruded aluminum studs with solid wood core	Reduces corrosion and minimizes bowing effect
Chrome plated steel hangers	Corrosion resistant and maintenance free

Applications:

- Offices
- Conference Rooms
- Hospitality
- Healthcare Facilities


© 2011-2017
Pemko Manufacturing Company



Sliding Pocket Door Solutions

Sliding pocket doors are a great way to conserve space and recover space lost to swinging doors. They can also be used to add a door when swing clearance is limited. The Pemko Pocket Frame Kit has solid wood studs encased in extruded aluminum to reduce corrosion and minimize any bowing effect.

Available Kits:	2 x 4 (3 1/2" Stud)	2 x 6 (5 1/2" Stud)	2 x 6 (6" Stud)
PF134KIT - Must be ordered for 1 3/4" doors	PF28200A6080	PF28200A6080-2x6	PF28200A6080-SP6
	PF28200A7280	PF28200A7280-2x6	PF28200A7280-SP6
	PF28200A9680	PF28200A9680-2x6	PF28200A9680-SP6
	PF28200A6084	PF28200A6084-2x6	PF28200A6084-SP6
	PF28200A7284	PF28200A7284-2x6	PF28200A7284-SP6
	PF28200A9684	PF28200A9684-2x6	PF28200A9684-SP6
	PF28200A6096	PF28200A6096-2x6	PF28200A6096-SP6
	PF28200A7296	PF28200A7296-2x6	PF28200A7296-SP6
	PF28200A9696	PF28200A9696-2x6	PF28200A9696-SP6

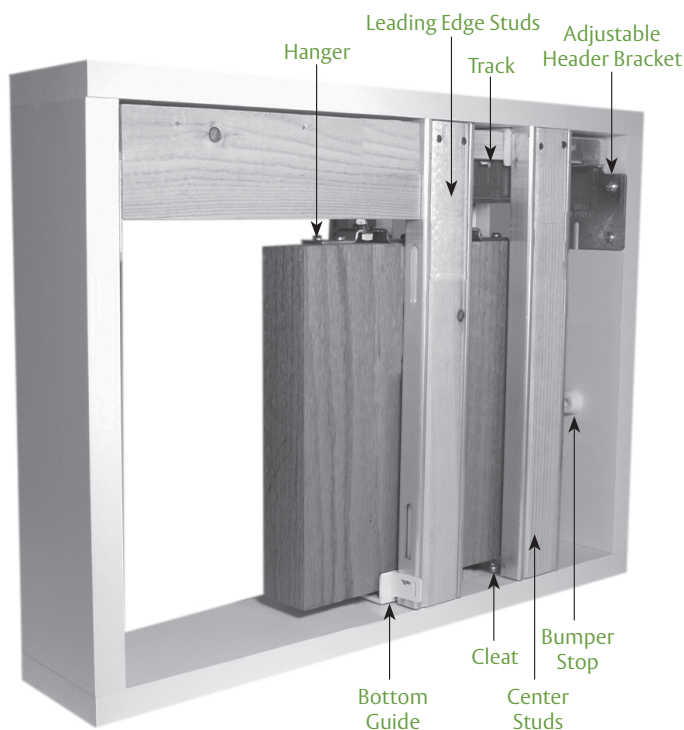

Technical Specifications:

- Heavy duty hardware supports doors up to 175 lbs. each leaf
- Door actuation requires less than 5 lbs of horizontal force, meeting ADA requirements
- Extruded aluminum track
- Solid wood studs encased in extruded aluminum reduces corrosion and minimizes bowing effects
- Chrome plated steel hangers are corrosion resistant and no maintenance is required

Materials Included:

- Header Track Assembly (1)
- Aluminum Cased Wood Studs (4)
- Pre-mounted Header Brackets (2)
- Hangers (2)
- Floor Cleats (2)
- Assembly Kit: mounting hardware, bumper stop, bottom guide, and adjusting wrench. For part numbers of kit components, see full line catalog.

Options:

PF134KIT - Must be ordered for 1 3/4" doors with 3 1/2" stud walls

*PFAS88 - An extra pair of 88" center studs with floor cleat for 84" tall doors

*PFAS100 - An extra pair of 100" center studs with floor cleat for 96" tall doors

PFCDKIT - Conversion Kit to achieve a bipart double door frame

*Recommended for doors over 3' wide

NOTE: Sliding and Folding products are under warranty for 5 years on Pemko Sliding & Folding Products and 2 years on Henderson Sliding & Folding Products.