


**SCHLAGE**

## L Series

Electrified mortise lock

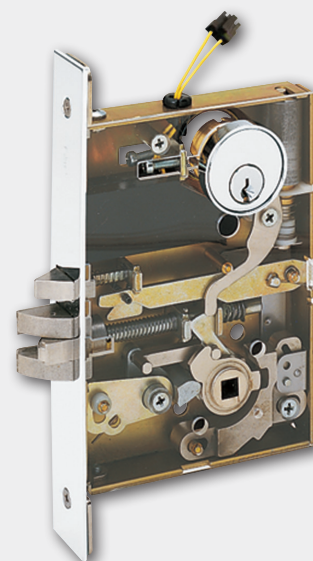

### Overview

The most complex electronic access systems still rely on mechanical hardware to operate properly. Advanced electronic technology can go to waste without adequate mechanical locking strength and functionality.

The Schlage L Series of electrified mortise locks serves as the mechanical component to an electrified locking solution. The lock can be integrated into an electronic access control system or be used as a stand-alone solution with a buzzer or other device as the controller.

The L Series offers exceptional flexibility and power savings. The lock automatically adapts to 12V or 24V DC input, and a case-mounted switch allows selection between EL and EU operation. Request-to-exit is modular and can be added without opening the lock case. 0.4amps maximum current draw allows multiple units on a single power supply, while 0.01amps holding current eliminates "hot levers" in EL applications.

Utilizing the same levers, trims and options as the mechanical Schlage L Series mortise, it integrates as seamlessly with the mechanical component of the project as the electronic. And because it is based on the Schlage L mortise, it carries the same proven record of performance, strength and durability from the most trusted name in the industry.

#### Recommended applications

The wired electrified L Series is ideal for new construction and high traffic areas where hardwired power ensures continuous operation and where electrified door prep, hinges and wiring can easily be incorporated into the building.

The electrified L Series is regularly used as part of an access control system for high security areas, or independently in areas that require a remote access switch.

### Features and benefits

- Universal input voltage – accepts 12V or 24V DC for installation flexibility
- User selectable fail safe/fail secure through use of switch on lock case
- Low maximum current draw allows multiple locks on a single power supply
- Low holding current produces minimal heat, eliminating "hot levers" in electrically locking applications
- Modular RX design allows RX to be added at a later time without opening the lock case
- UL listed for 3 hour fire door
- **NEW!** Available with Vandlgard®. Ideal for areas subject to abuse or vandalism

#### Available Options:

- Request-to-Exit (RX)
- Latchbolt Monitor (LX)
- Door Position Sensor (DPS)  
- non-deadbolt functions only
- Deadbolt Monitor (DM)  
- deadbolt functions only

## L Series mechanical specifications

Handing	Field reversible
Door thickness	1 3/4" (44 mm) standard, 1 3/8" (35 mm) to 2 1/2" (64 mm) optional. Over 2 1/2" (64 mm) door ranges vary by function. Specify door thickness other than 1 3/4" and position in door EE, EI, EO, and ED.
Backset	2 3/4" (70 mm) only
Armored front	Standard: 1 1/4" x 8" x 7/32" (32 mm x 203 mm x 6 mm) Optional: 1 1/16" x 8" x 7/32" (27 mm x 203 mm x 6 mm)
Case size	4 7/16" x 6 1/16" x 1" (113 mm x 154 mm x 25 mm)
Spacing	Knob or lever to cylinder, 3 7/8" (98 mm); knob or lever to thumbturn hub, 2 1/16" (68 mm)
Bolts	1" (25 mm) throw stainless steel deadbolt and 3/4" (19 mm) throw stainless steel latch with anti-friction tongue
Cylinders and key systems	Standard: Pin and tumbler mechanism in the Patented Schlage Everest 29 S123 keyway (6-pin); two nickel silver cut keys per lock  Additional keying options available: Conventional and interchangeable cores; master and grand master keying; compatible with competitor cylinders and cams that support the L9000 Series
Strike	ANSI curved lip strike 1 1/4" x 4 7/8" (32 mm x 124 mm) x 1 3/16" (30 mm) lip to center with dust box standard
Trim	Five roses (sectional) and two escutcheons available
Levers	33 lever and two knob designs Ligature resistant and hospital push/pull trim also available
Finishes	14 available

### Vandlgard®

The outside lever rotates freely down when locked, limiting the ability of vandals to apply excessive force which could damage the lock.



## L Series electronic specifications

Voltage	Auto-detects 12/24V DC operation
Peak current	0.4 amps
Holding current	0.010 amps
Operating temperature	Maximum +140°F (+60°C) Minimum -22°F (-30°C)
Interfacing devices	Biometric devices, wall switches, security consoles, access card readers, thermo-sensitive devices, smoke and fire alarms, telephone access controls, automatic time devices and computerized controls
Micro switch electrical rating for request-to-exit (RX) function and latchbolt monitor (LX)	3 amps, 125V AC; 2 amps, 30V DC

## L Series electrified functions

No Cylinder	L9090EL/EU Electrically locking/unlocking outside lever L9091EL/EU Electrically locking/unlocking both levers
Outside Cylinder	L9092EL/EU Electrically locking/unlocking outside lever L9093EL/EU Electrically locking/unlocking both levers
Inside & Outside Cylinder	L9094EL/EU Electrically locking/unlocking outside lever L9095EL/EU Electrically locking/unlocking both levers

## L Series electrified deadbolt functions

Outside Cylinder	L9492EL/EU Electrically locking/unlocking outsider lever, inside thumbturn, with deadbolt L9493EL/EU Electrically locking/unlocking both levers
Inside & Outside Cylinder	L9494EL/EU Electrically locking/unlocking outsider lever L9495EL/EU Electrically locking/unlocking both levers

Note: See pricebook for additional details.

Allegion, the Allegion logo, Schlage, and the Schlage logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.

## About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries. For more, visit [www.allegion.com](http://www.allegion.com).

KRYPTONITE ■ LCN ■  ■ STEELCRAFT ■ VON DUPRIN



© 2019 Allegion  
004998, Rev. 12/19  
[www.allegion.com/us](http://www.allegion.com/us)