


WIDE STILE SHOWN

STD APPLICATION

3/8" DIA. THRU  
ENLARGE TO 13/32" DIA.  
OUTSIDE FACE OF DOOR  
FOR SEX BOLTS  
2 HOLES

#12-24 TAP  
INSIDE FACE OF DOOR  
2 HOLES

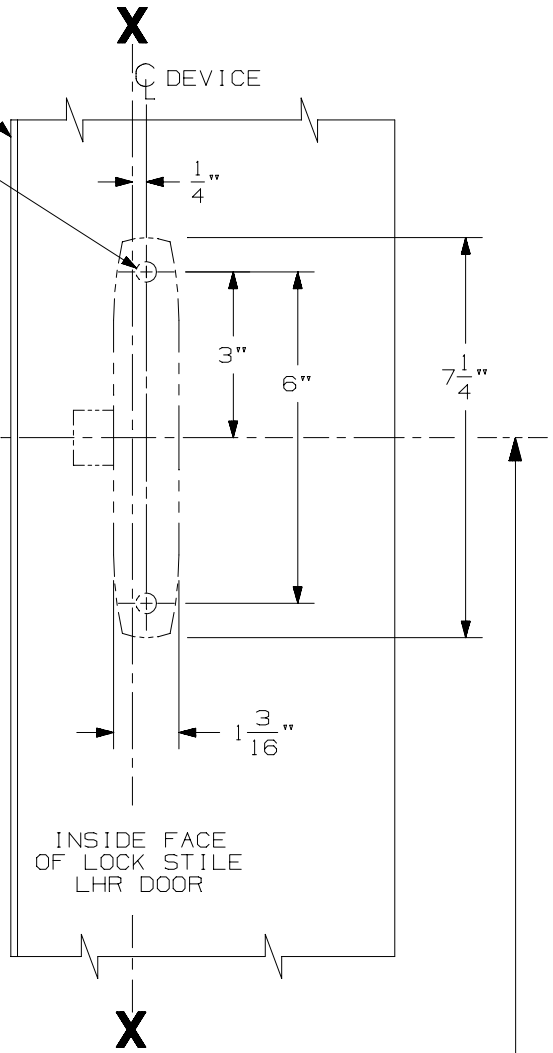

SINGLE DOOR OPENING  
39 13/16" TO FINISHED FLOOR.


DOUBLE DOOR OPENING  
WITH VON DUPRIN MULLION  
39 11/16"

CROSSBAR 36 13/16" FROM FINISHED FLOOR

FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED,  
SEE ADDITIONAL TRIM TEMPLATE.

SINGLE DOOR INSTALLATION

|   | STRIKE      | DIMENSION "B" | MIN. STILE |
|---|-------------|---------------|------------|
| ⑦ | 299         | 1 19/32"      | 2 13/16"   |
|   | 264         | 1 11/32"      | 2 9/16"    |
|   | 1606        | 1 5/32"       | 2 3/8"     |
| ⑦ | 1409 & 1439 | 25/32"        | 1 3/4"     |
|   | 1410        | 25/32"        | 1 3/4"     |

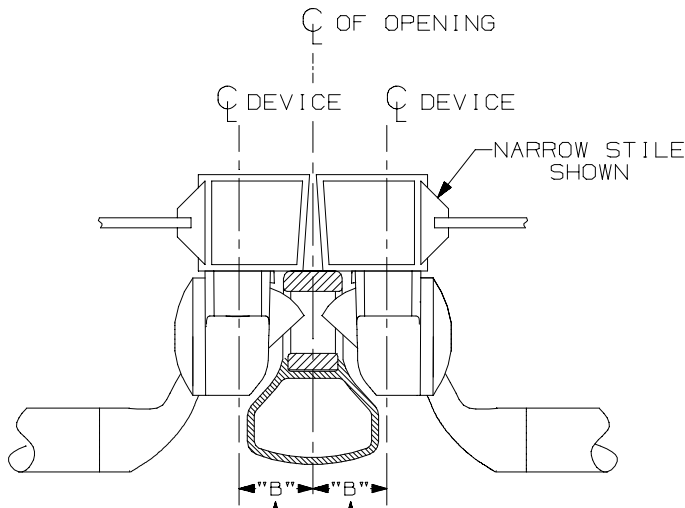

DOUBLE DOOR INSTALLATION  
WITH VON DUPRIN MULLIONS

|   | MULLION | STRIKE | DIMENSION "B" | MIN. STILE |
|---|---------|--------|---------------|------------|
| ⑦ | 5654    | 299    | 2 5/32"       | 2 3/4"     |
|   | 5654    | 264    | 1 29/32"      | 2 1/2"     |
| ⑦ | 4954    | 299    | 2 19/32"      | 3 3/16"    |
|   | 4954    | 264    | 2 11/32"      | 2 15/16"   |
|   | 1654    | 1606   | 2 5/32"       | 2 3/4"     |
|   | 5754    | 1408   | 1 9/32"       | 1 3/4"     |

## 55EO & 55DT Series Rim Devices

# VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE  
NUMBER:

10061\_b

DATE:  
06-5-15